



ABSTRACT OF THE GENERAL CONDITIONS OF SALE

1. Prices include carton packing.
2. The volume indications where specified refer to the volume of the packing boxes of the items.
3. The weight indications where specified refer to the net weight of the items.
4. Venitem S.r.l. declines any liability for transport damage as goods are carefully inspected and packed before shipment.
5. Any claims have to be notified by fax or by e-mail, within 8 days from receipt of goods.
6. The items shown in red are available until they are sold out. Before ordering, please contact our Customer Services to check if the items are available. Tel +39.041.5740374.
7. Venitem S.r.l. declines any liability for the non-observance – even partial – of the installation and assembly instructions provided or requested, or for the inappropriate use of the products it manufactures. Venitem S.r.l. will not be held liable for any property damage or personal injury caused by the incorrect installation of its products.
8. Dimensions and colors may vary from one production batch to the other.
9. The details given here are intended purely as guidance as errors may have occurred during the printing process. Venitem S.r.l. may make alterations of any type to the products and relevant instructions without notice. Venitem S.r.l. does not provide legal guarantee regarding the accuracy of the data provided in this price list.
10. It is understood that any use of promotional material made available by Venitem S.r.l. implies the full acceptance of the “Conditions for use of promotional material of Venitem S.r.l.”.
11. Any dispute that may arise shall submit to the sole jurisdiction of the Courts of Venice.

In force from 2 may 2023

02

PRICE LIST



INDEX

OUTDOOR ALARM SOUNDERS

GIUDECCA	pag. 12
MOSE	pag. 14
MURANO	pag. 16
DOGE.....	pag. 18
DOGE WIRELESS	pag. 20
DOGE PIEZO.....	pag. 22
HOLA.....	pag. 24
MARINA.....	pag. 26
HEMA	pag. 28
RIO	pag. 30
RONDO	pag. 32
TRIADE	pag. 34
RIALTO	pag. 36

INDOOR ALARM SOUNDERS

MINI GIUDECCA	pag. 40
MINI DOGE	pag. 42
MINI HEMA	pag. 44
MINI MARINA	pag. 46
MINI MURANO.....	pag. 48
MINI HOLA.....	pag. 50
SP200.....	pag. 52

FIRE AND EVACUATION RANGE

DOGE F24.....	pag. 56
TRIADE F24	pag. 58
MOSE F24EN	pag. 60
MURANO F24EN.....	pag. 62
HOLA F24EN	pag. 64
MINI DOGE F24	pag. 66
MINI DOGE FL24	pag. 66
DOGE EV	pag. 68
CI PLEXIGLASS	pag. 70

SOUNDERS AND PANELS FOR EMERGENCY EXIT

HOLA UECP	pag. 74
TRIADE UE	pag. 76
TPUS	pag. 78

POWER SUPPLIES – MULTIFUNCTION TECHNOLOGY

SPECIAL POWER SUPPLIES	pag. 82
13.8 VDC AND 27.6 VDC SPECIAL POWER SUPPLIES FOR INTRUSION AND CCTV SYSTEM ...	pag. 83
STABILIZED POWER SUPPLIES IN BOX	pag. 84
OUTDOOR POWER SUPPLIES IN WATERPROOF BOX.....	pag. 85
CCTV SWITCHING POWER SUPPLIES	pag. 86
12 VAC STABILIZED TENSION REDUCERS	pag. 87
EN 54-4 CERTIFIED FIRE POWER SUPPLIES.....	pag. 88
BOXES FOR POWER SUPPLIES	pag. 90

RELAY AND MULTIFUNCTION BOARDS

RELAY AND MULTIFUNCTION BOARDS	pag. 93
--------------------------------------	---------

CONTROL PANELS

DOGE CT3.....	pag. 98
DOGE CT7.....	pag. 100
CTH-18.....	pag. 102
V8-20 / V8-20 XL.....	pag. 104

KEYPADS AND REMOTE CONTROLS

ONDA TOUCH KEYPAD.....	pag. 108
ONDA PULSE KEYPAD	pag. 108
ONDA DIGITAL W KEYPAD.....	pag. 109
VELA 2.0 REMOTE CONTROL.....	pag. 110
VELA REMOTE CONTROL	pag. 110
VELA-W REMOTE CONTROL - VELA 20 CH-W - FARO-W - BOMA-W.....	pag. 111

MAGNETIC CONTACTS..... pag. 113

OPTICAL-ACOUSTIC SIGNALERS..... pag. 117

OUTDOOR DETECTORS..... pag. 121

INDOOR DETECTORS..... pag. 131

SMART HOME ACCESSORIES..... pag. 137

CERTIFICATIONS

VEN



ITEM



LEGEND



Production warranty



IMQ Safety Systems Certification



Complying with IMQ EN 54-3 Standard



Complying with IMQ EN 54-4 Standard



Complying with IMQ EN 50131-6 Standard



Complying with EN 54-3 Standard



Complying with EN 54-4 Standard



Compliant with EN 50131-4 Standard



Complying with EN 12101-10 Standard



Compliant with EN 50849 Standard



INCERT Certification



Security level



Protection level



Environmental class



Positive and negative ON/OFF settable by dip switch





































Command for sound interruption



Battery control according to EN 50131 standard




Optical and acoustic ON/OFF signaling

	Optical ON/OFF signaling		Polycarbonate
	Customizable RGB LED optical ON/OFF signaling		Cover in ABS anti UV
	Flash reset		Painted metal
	Number of timings settable by dip switch		Stainless steel
	Number of sounds settable by dip switch		ABS Plastic
	Spirit level		Painted cover in ABS V0
	Patented LED lighting system		Number of sounds settable for alarm and pre-alarm
	Vocal system with digital audio module		Two sounds of different power
	Anti-opening and anti-removal tamper system		LED lighting: 1 blue / 5 blue / 5 white
	Magnetic reed		BLUE LED for system ON/OFF signaling and courtesy-light function
	Micro switch gold plated contacts		HIGH-POWER adjustable sound
	Anti-foam and anti-shock system		Settable acoustic ON/OFF signaling
	Anti-drilling system		Input/output adjustable timing
	Speaker		A single unit controls up to 3 doors
	High-power speaker		3 alarm inputs and 1 input 24 h
	Alarm counting		
	Flashing light separately switchable		
	Output for faults/anomalies		
	Circuits protected by resin		






OUTDOOR *ALARM SOUNDERS*




GIUDECCA

In-wall sounder for outdoors with RGB LED flashing unit for the management of the optical alerts.

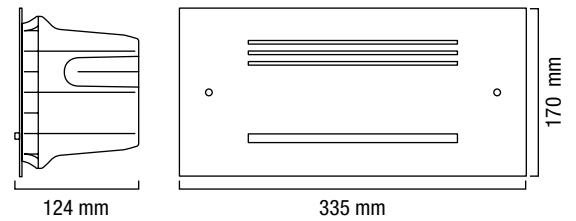

EXTERNAL COVER COLORS

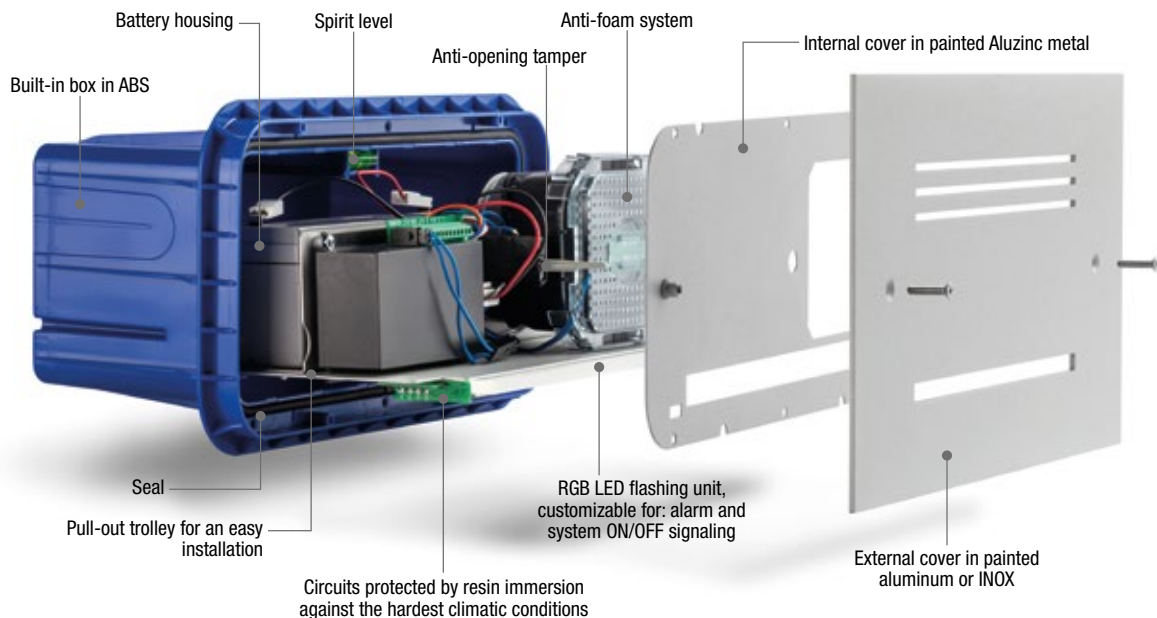




DRILLING TEMPLATE

Drilling template to easily make the hole for Giudecca in-wall box in case of already existing walls.



BUILT-IN BOX

- Built-in box provided in first-rate ABS with seal.
- Removable cover in galvanized metal.

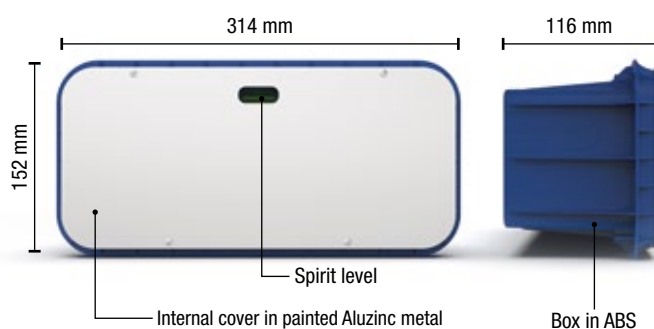

GIUDECCA



► 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-removal tamper.

UNITS/PACK

1

CUSTOMIZATIONS

* Extra cost for brushed stainless steel finishing

Extra cost for customized colors (50 pcs min.)

WARRANTY
10 YEARS



SECURITY
4°


IP GRADE
44

ON/OFF
+ -



MOSE

Outdoor sounder that integrates acoustic signaler and LED system for night lighting and optical signaling.



◆ Until supplies last

EXTERNAL COVER COLORS




Matt white

Matt black

◆ Chromium *

TECH COLORS



◆ Shiny black **

◆ Shiny grey **


FLASH COVER COLORS



Light blue

◆ Smoke grey

MOSE LSP VOCAL LUX

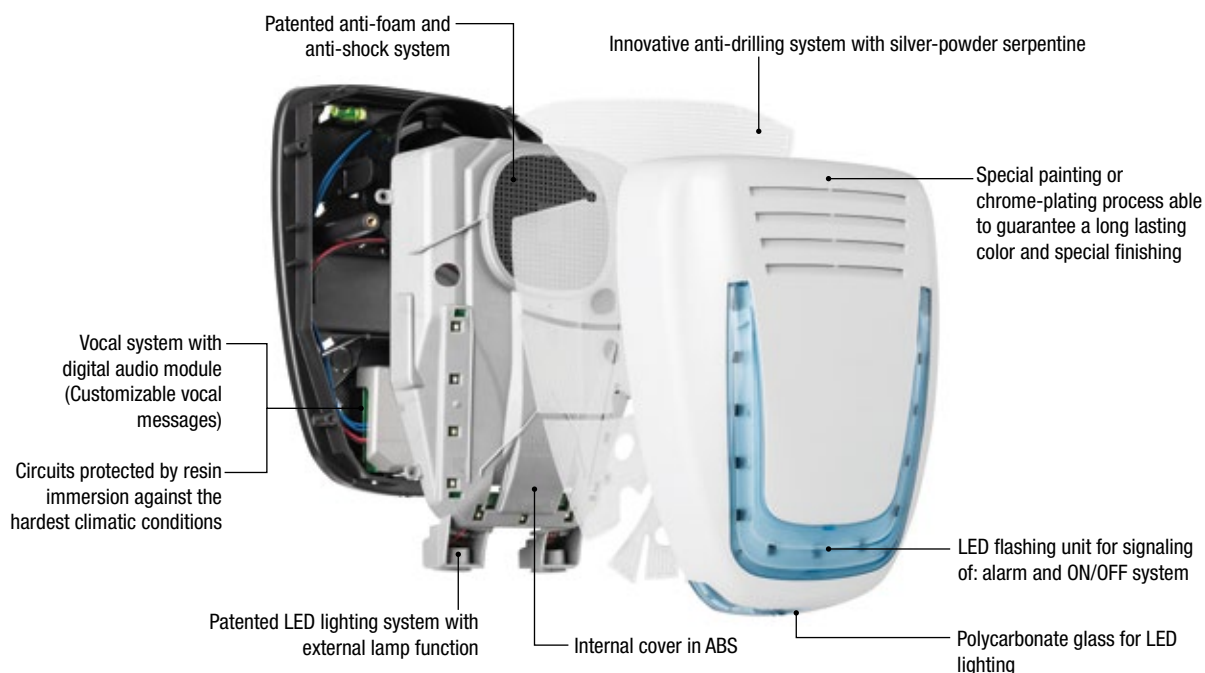



	UNITS/PACK
MOSE L	
SECURITY 3° ▶ 13.8 Vdc self-powered sounder with LED flashing unit.	5
MOSE LS	
SECURITY 4° ▶ 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device.	5
MOSE LSP	
SECURITY 4° ▶ 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and anti-drilling system.	5
MOSE L LUX	
SECURITY 3° ▶ 13.8 Vdc self-powered sounder with LED flashing unit and patented LED lighting system.	5
MOSE LS LUX	
SECURITY 4° ▶ 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and patented LED lighting system.	5
MOSE LSP LUX	
SECURITY 4° ▶ 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device, anti-drilling system and patented LED lighting system.	5
MOSE L VOCAL	
SECURITY 3° ▶ 13.8 Vdc self-powered sounder with LED flashing unit and vocal module.	5
MOSE LS VOCAL	
SECURITY 4° ▶ 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and vocal module.	5
MOSE LSP VOCAL	
SECURITY 4° ▶ 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device, anti-drilling system and vocal module.	5
MOSE L VOCAL LUX	
SECURITY 3° ▶ 13.8 Vdc self-powered sounder with LED flashing unit, patented LED lighting system and vocal module.	5
MOSE LS VOCAL LUX	
SECURITY 4° ▶ 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device, patented LED lighting system and vocal module.	5
MOSE LSP VOCAL LUX	
SECURITY 4° ▶ 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device, anti-drilling system, patented LED lighting system and vocal module.	5
DUMMY	
▶ Mose housing only.	5

CUSTOMIZATIONS

* Extra cost for Chromium color

** Extra cost for tech colors

Extra cost for customized colors (50 pcs. min.)

Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)

WARRANTY
10
YEARS



SECURITY
4°

IP GRADE
44

ON/OFF
+ -



TM



1.2.3




**ABS
ANTI
UV**



MURANO

Outdoor sounder with a strong aesthetic personality that enhances the architecture in which it is integrated.
1° Prize for Design *Safety&Security Awards*

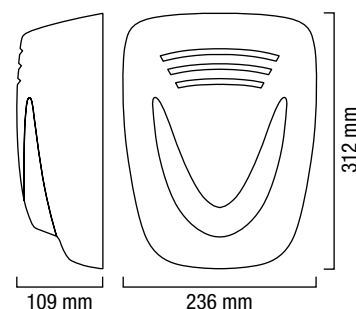

◆ Until supplies last


EXTERNAL COVER COLORS



FLASH COVER COLORS



MURANO LSP

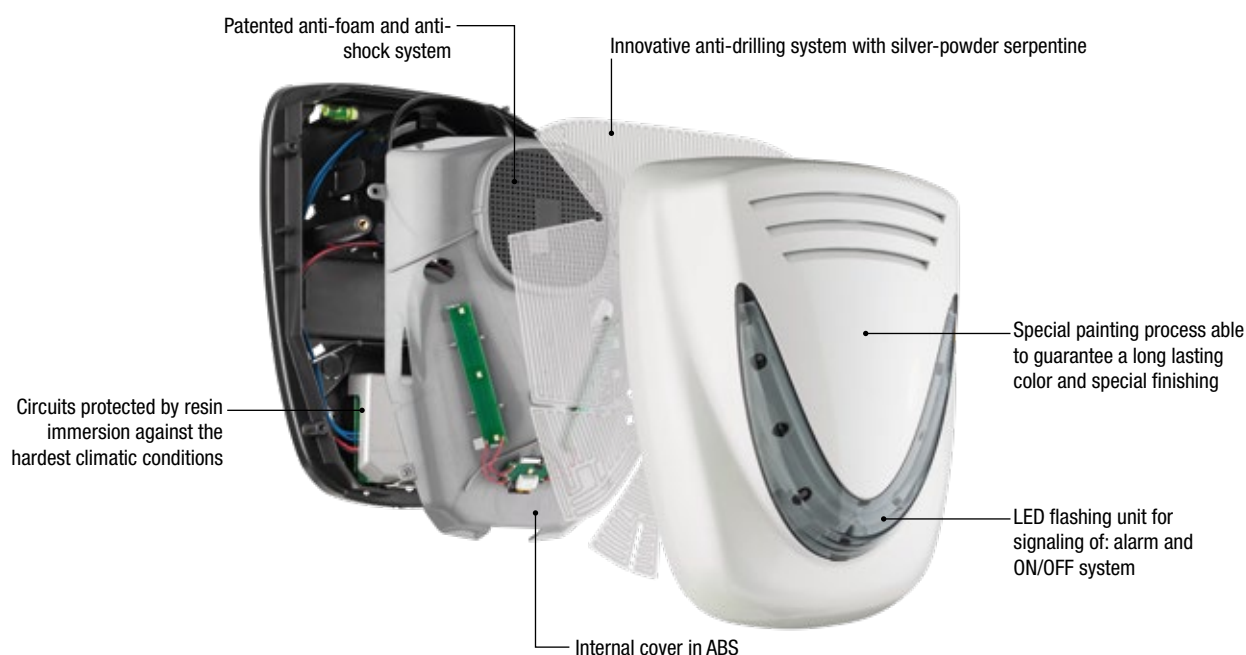

security&safety
award 2008

TOP SELECTION
DESIGN



UNITS/PACK

MURANO L

SECURITY 3° ► 13.8 Vdc self-powered sounder with LED flashing unit. 5

MURANO LS

SECURITY 3° ► 13.8 Vdc self-powered sounder with LED flashing unit and anti-foam and anti-shock device. 5

MURANO LSP

SECURITY 4° ► 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and anti-drilling system. 5


DUMMY

► Murano housing only. 5

CUSTOMIZATIONS


Extra cost for customized colors (50 pcs. min.)

Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)



DOGE

Outdoor sounder with an eclectic design, available in a wide color range and suitable for any environment.




EXTERNAL COVER COLORS



FLASH COVER COLORS



DOGE LSP

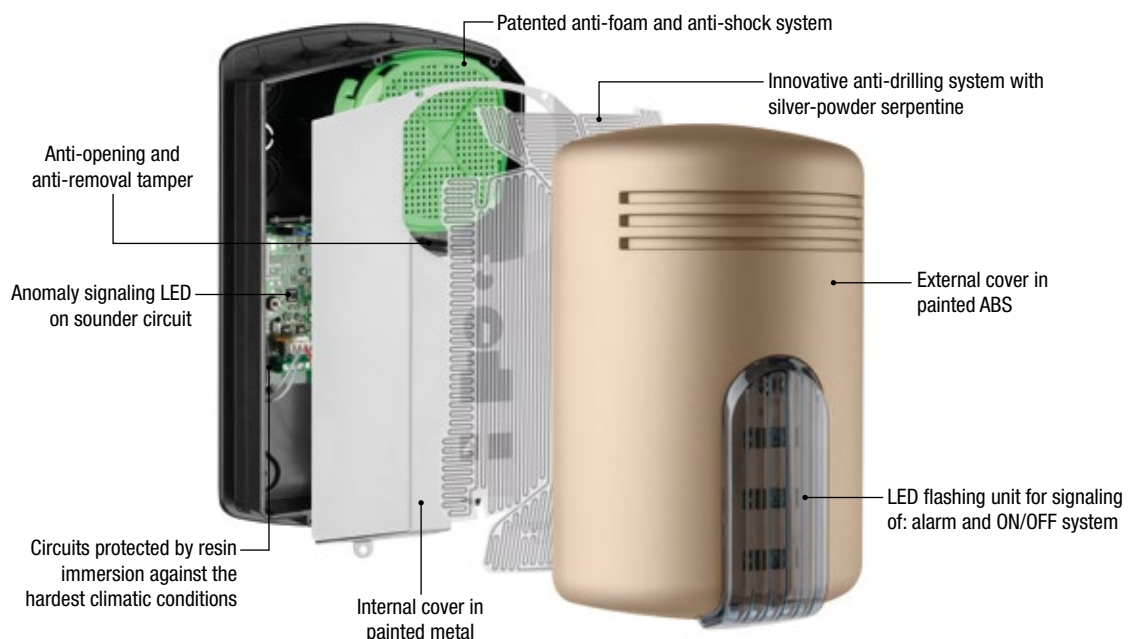



UNITS/PACK

DOGE L

SECURITY 3° ► 13.8 Vdc self-powered sounder with LED flashing unit.

6

DOGE LS

SECURITY 3° ► 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device.

6

DOGE LSP

SECURITY 4° ► 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and anti-drilling system.

6

DUMMY

► Doge housing only.

6

CUSTOMIZATIONS

Extra cost for customized colors (50 pcs. min.)

Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)




DOGE WIRELESS

Wireless outdoor sounder designed to serve complex installations.



1° for prize
ELECTRONIC SYSTEMS AND EQUIPMENT

VENITEM
Doge AS1 Wireless sounder



◆ Until supplies last


EXTERNAL COVER COLORS



FLASH COVER COLORS



DOGE WIRELESS

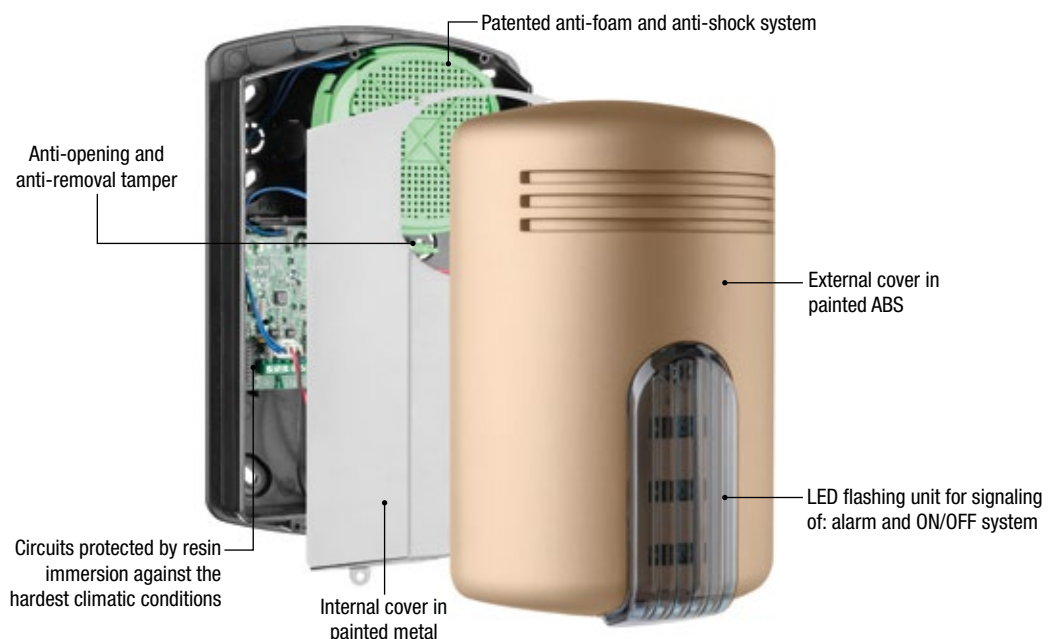



ATX2/S ♦

Two-way radio device with internal sounder able to control up to 8 Doge wireless sounders.

Anomaly LEDs and display to visualize memorized sounders




TBA 7.5

7.5 Vdc alkaline battery pack.

ATX3

Two-way radio device without internal sounder to control up to 8 Doge wireless sounders.



Display to visualize memorized sounders

General anomaly LED

UNITS/PACK

KIT1 ♦

- ▶ KIT1 DOGE wireless with anti-foam and anti-shock device + ATX2/S + TBA 7.5 battery. 4

KIT1/P ♦

- ▶ KIT1/P DOGE wireless with anti-foam and anti-shock device, anti-drilling system + ATX2/S + TBA 7.5 battery. 4

KIT2

- ▶ KIT2 DOGE wireless with anti-foam and anti-shock device + ATX3 + TBA 7.5 battery. 4

KIT2/P

- ▶ KIT2/P DOGE wireless with anti-foam and anti-shock device, anti-drilling system + ATX3 + TBA 7.5 battery. 4

DOGE AS1

- ▶ DOGE AS1 DOGE wireless with anti-foam and anti-shock device + TBA 7.5 battery. 4

DOGE AS1/P

- ▶ DOGE AS1/P DOGE wireless with anti-foam and anti-shock device, anti-drilling system + TBA 7.5 battery. 4

ACCESSORIES


UNITS/PACK

ATX2/S ♦	Two-way radio device with internal sounder to control up to 8 Doge wireless sounders.	4
ATX3	Two-way radio device without internal sounder to control up to 8 Doge wireless sounders.	4
TBA 7.5	7.5 Vdc alkaline battery pack.	1



DOGE PIEZO


Self-powered sounder for 12 Vdc low-consumption applications (400 mA). Also available in standard 13.8 Vdc and remotely-powered versions (without battery).



EXTERNAL COVER COLORS



FLASH COVER COLORS



DOGE L PIEZO





Anomaly signaling LED on sounder circuit

UNITS/PACK

DOGE L PIEZO NI-MH



► Self-powered sounder with LED flashing unit. Double-piezo circuit for low-consumption applications (**12 Vcc - 400 mA max**). 9.6 Vdc 2.2 Ah Ni-Mh battery not included. For ≤ 12 Vdc control panels.

6

DOGE L PIEZO



► 13.8 Vdc self-powered sounder with LED flashing unit and double-piezo circuit. Remotely-powered version available upon request (without battery).

6

ACCESSORIES

UNITS/PACK

BATTERY 9.6 Vdc 2.2 Ah Ni-Mh battery for Doge L Piezo Ni-Mh.

1

CUSTOMIZATIONS

Extra cost for customized colors (50 pcs. min.)


Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)




HOLA

Outdoor siren with elegant and linear design, developed to suit any kind of contexts and offer a wide range of personalization possibilities.

Hola can be installed both vertically and horizontally.




EXTERNAL COVER COLORS

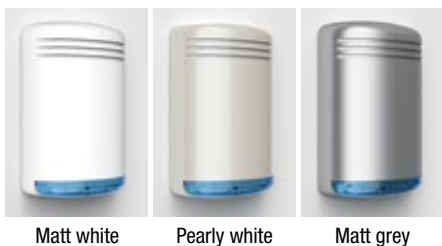

FLASH COVER COLORS




HOLA LSP

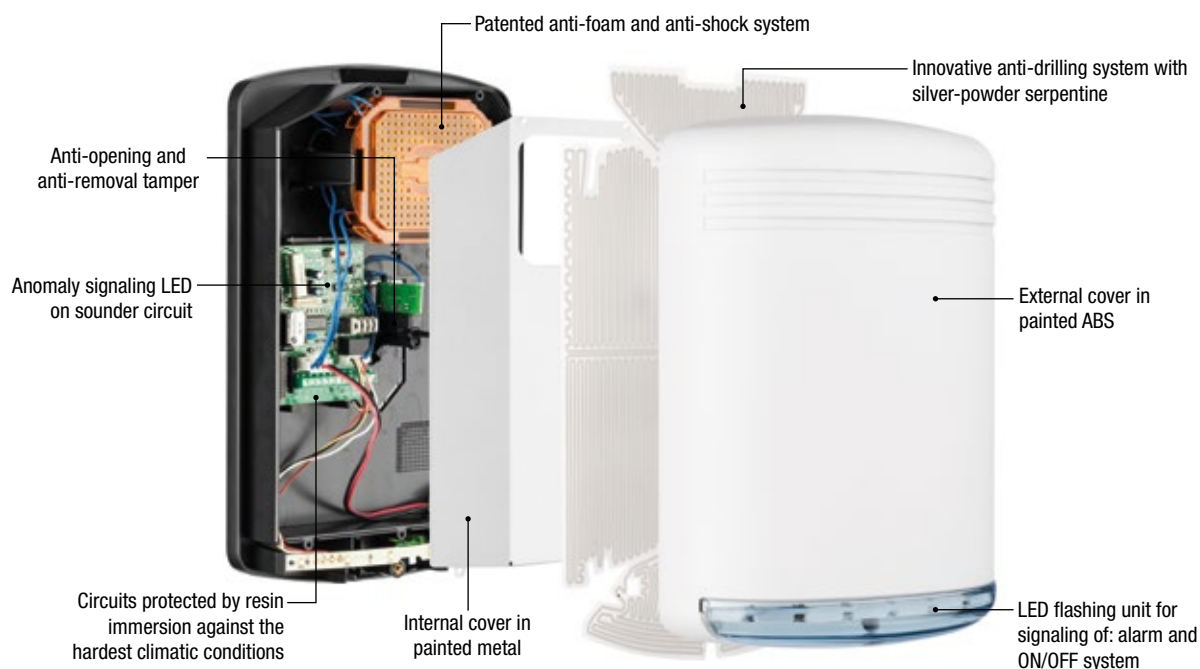




UNITS/PACK

HOLA L

 ► 13.8 Vdc self-powered sounder with LED flashing unit.


6

HOLA LS

 ► 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device.

6

HOLA LSP

 ► 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and anti-drilling system.

6

DUMMY

► Hola housing only.

6

CUSTOMIZATIONS

Extra cost for customized colors (50 pcs. min.)


Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)



MARINA

Outdoor sounder with integrated LED system for signaling of 3 different system status.

◆ Until supplies last



EXTERNAL COVER COLORS



Matt white

Pearly white

Matt silver


FLASH COVER COLORS



Orange

Light blue

LED SIGNAL OPTIONS

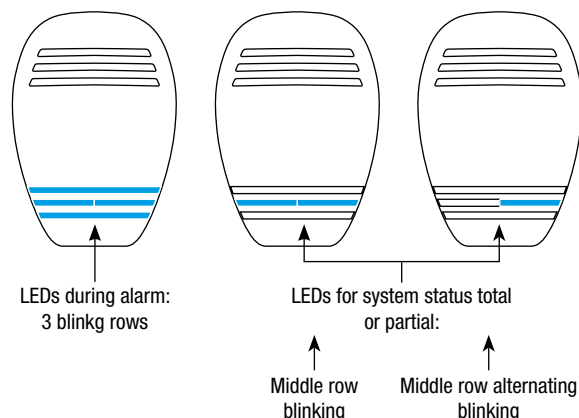

LEDs during alarm:
3 blinkg rows

LEDs for system status total
or partial:

Middle row
blinking

Middle row alternating
blinking


MARINA LS






UNITS/PACK

MARINA L

 ► 13.8 Vdc self-powered sounder with LED flashing unit.

6

MARINA LS

 ► 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device.

6

DUMMY

► Marina housing only.

6

CUSTOMIZATIONS

Extra cost for customized colors (50 pcs. min.)

Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)

WARRANTY
10
YEARS

EN 50131-4

SECURITY
4°

IP GRADE
44

ON/OFF
+ -



TR




ABS
ANTI
UV



HEMA

Outdoor sounder with integrated LED system that combines aesthetics, function and ease of installation.

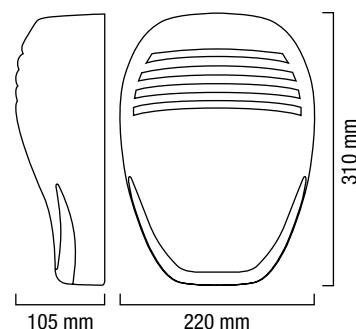

◆ Until supplies last

EXTERNAL COVER COLORS




FLASH COVER COLORS




SAFETY HOOK

Innovative and exclusive safety hook for an easy and quick mounting of the sounder.

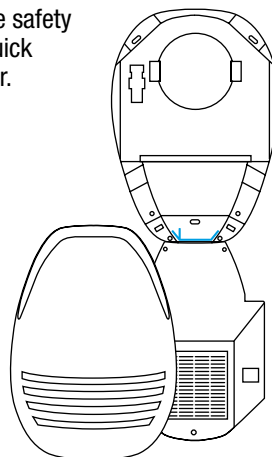

HEMA LSP

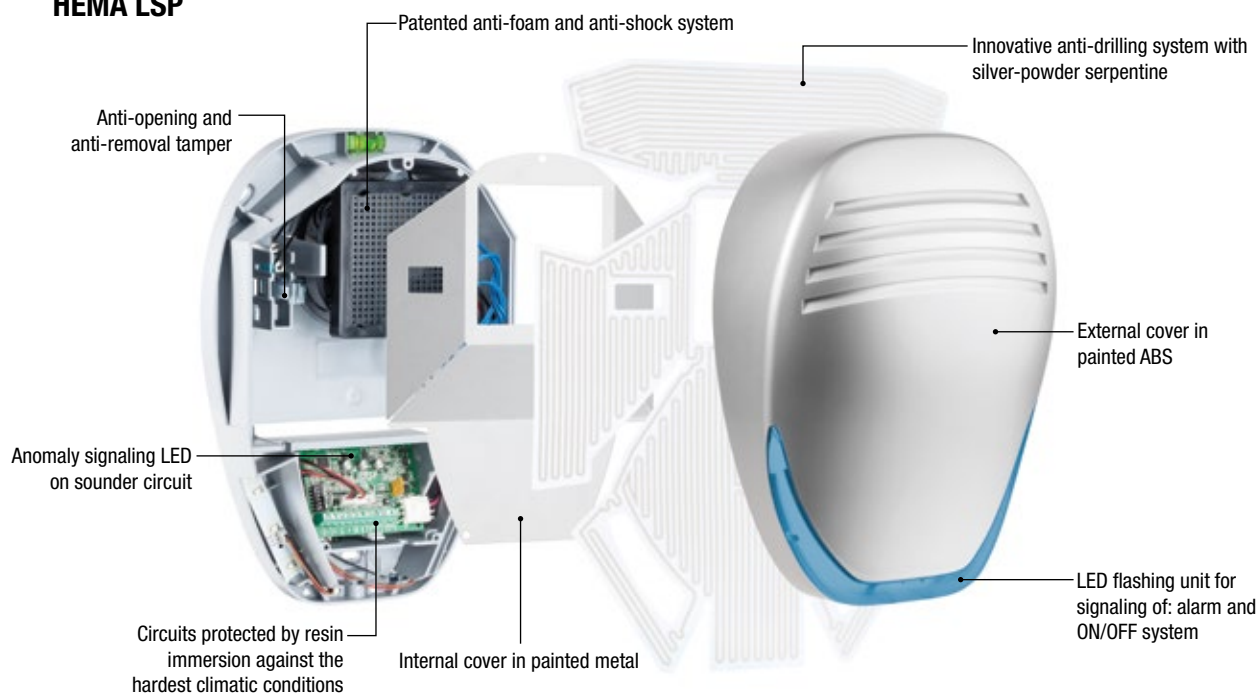



UNITS/PACK

HEMA L



► 13.8 Vdc self-powered sounder with LED flashing unit.

6

HEMA LS



► 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device.

6

HEMA LSP



► 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and anti-drilling system.

6

DUMMY

► Hema housing only.

6

CUSTOMIZATIONS

* Extra cost for Chromium color

Extra cost for customized colors (50 pcs. min.)


Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)



RIO

Outdoor sounder with integrated vertical LED system that increases the visibility of the system status.

◆ Until supplies last

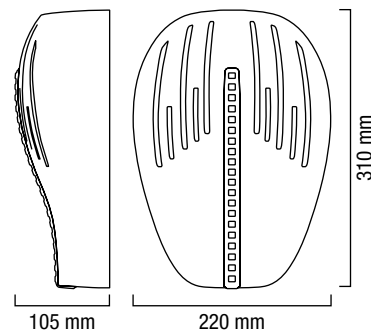

EXTERNAL COVER COLORS




FLASH COVER COLORS




SAFETY HOOK

Innovative and exclusive safety hook for an easy and quick mounting of the sounder.

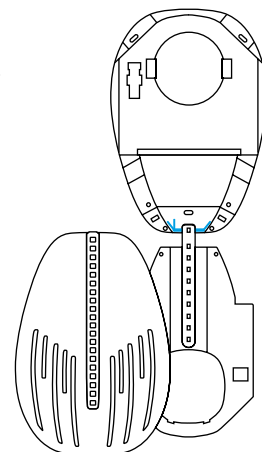

RIO LS

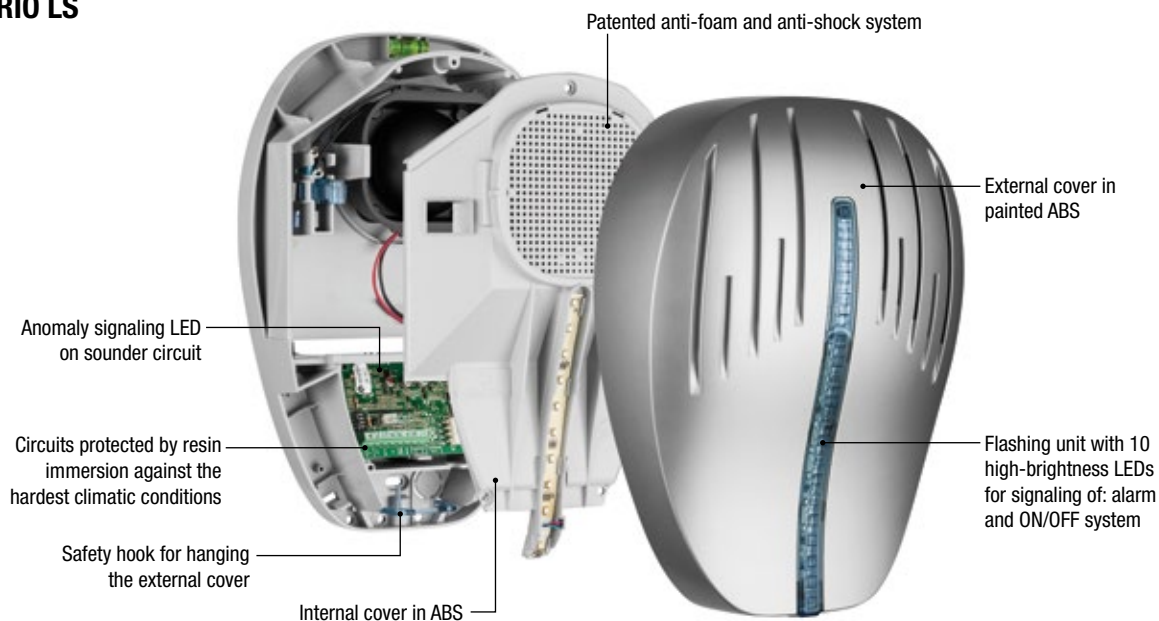



UNITS/PACK

RIO L

SECURITY 3° ► 13.8 Vdc self-powered sounder with LED flashing unit.

6

RIO LS

SECURITY 3° ► 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device.

6

DUMMY

► Rio housing only.

6

CUSTOMIZATIONS

* Extra cost for Chromium color

Extra cost for customized colors (50 pcs. min.)

Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)

WARRANTY
10
YEARS



SECURITY
3°

IP GRADE
44

ON/OFF
+ -



TR




ABS
ANTI
UV



RONDÒ

Outdoor sander with LED flashing unit for signaling of: alarm, system status, with versatile design and easy installation.

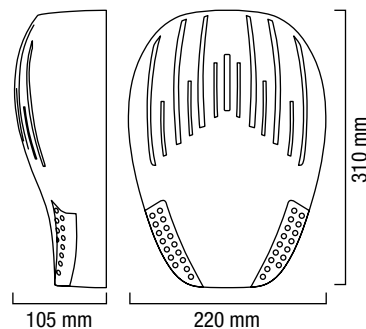

◆ Until supplies last

EXTERNAL COVER COLORS



White

Metal grey

* Chromium


FLASH COVER COLORS




Smoke grey

SAFETY HOOK

Innovative and exclusive safety hook for an easy and quick mounting of the sander.

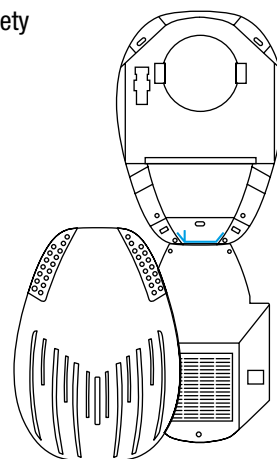

RONDÒ

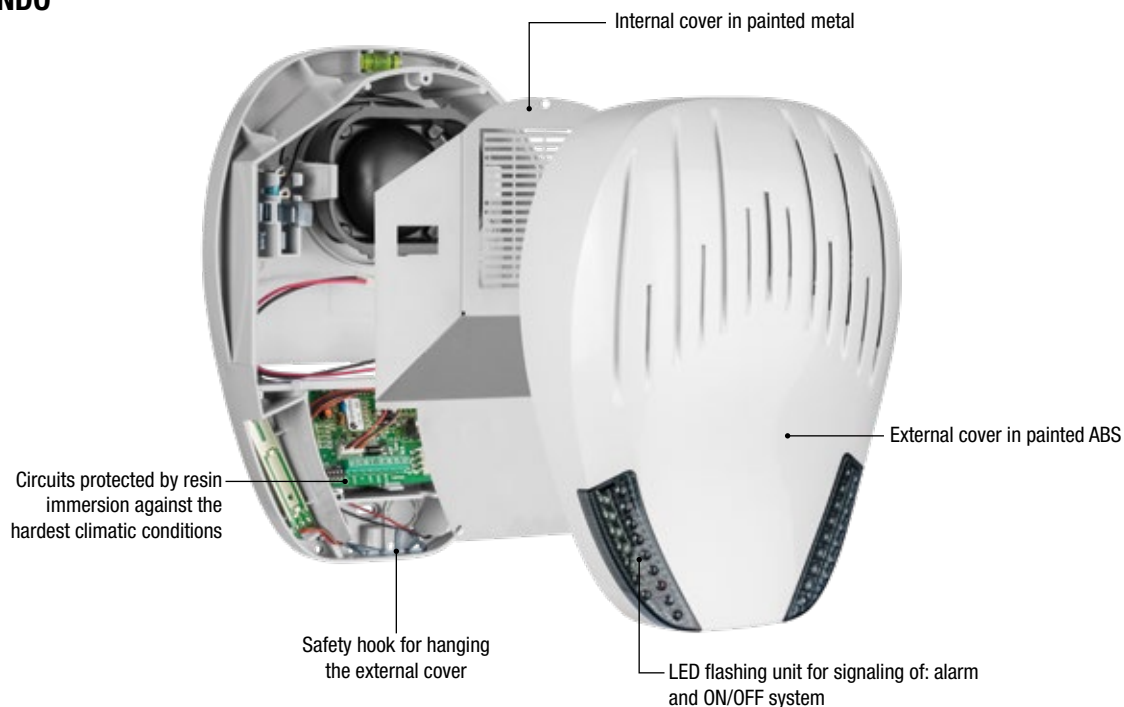



UNITS/PACK

RONDÒ L

3° ► 13.8 Vdc self-powered sounder with LED flashing unit.

6

DUMMY

► Rondò housing only.

6

CUSTOMIZATIONS

* Extra cost for Chromium color


Extra cost for customized colors (50 pcs. min.)

Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)




TRIADE

Outdoor sounder with high-resistance ABS external cover.

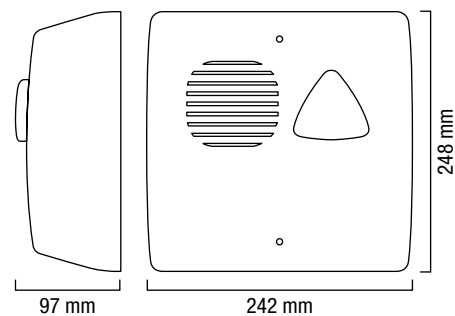

◆ Until supplies last

EXTERNAL COVER COLORS




FLASH COVER COLORS




TRIADE Q

Version with squared flash cover.



TRIADE LS

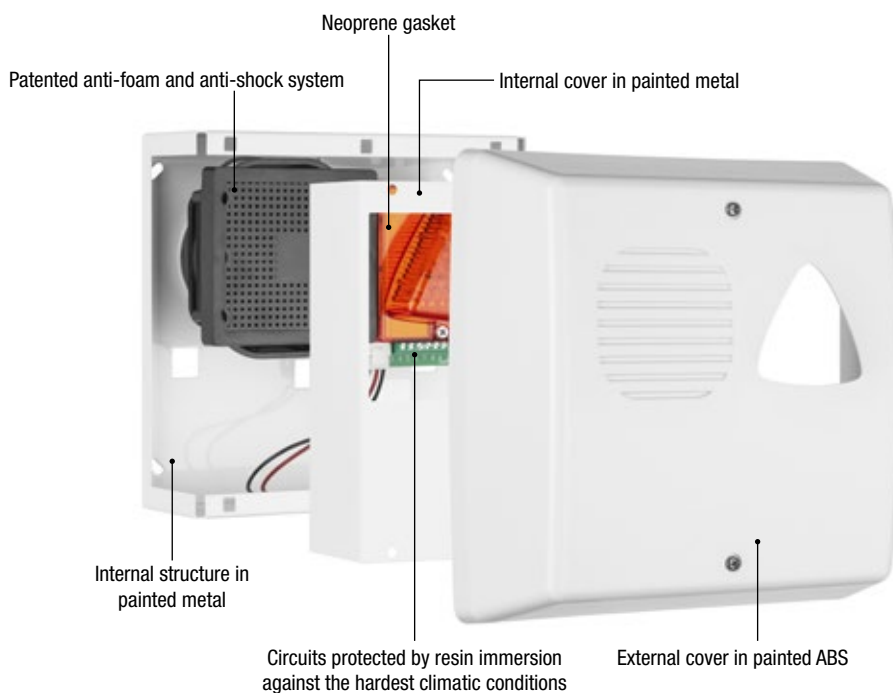



UNITS/PACK

TRIADE L

SECURITY 3° ▶ 13.8 Vdc self-powered sounder with triangular LED flashing unit.

6

TRIADE QL

SECURITY 3° ▶ 13.8 Vdc self-powered sounder with squared LED flashing unit.

6

TRIADE LS

SECURITY 3° ▶ 13.8 Vdc self-powered sounder with triangular LED flashing unit, anti-foam and anti-shock device.

6

TRIADE QLS

SECURITY 3° ▶ 13.8 Vdc self-powered sounder with squared LED flashing unit, anti-foam and anti-shock device.

6

DUMMY

▶ Triade / Triade Q housing only.

6

CUSTOMIZATIONS


Extra cost for customized colors (50 pcs. min.)

Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)



RIALTO

Outdoor sounder in painted metal with rigorous lines, resistant to weather conditions. Available in stainless steel version.

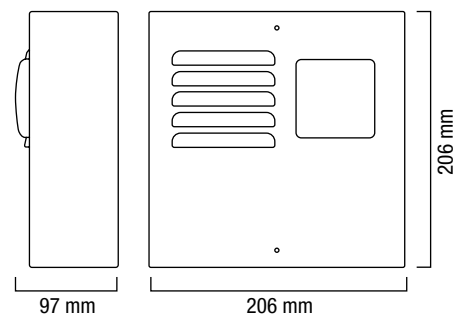

◆ Until supplies last


EXTERNAL COVER COLORS



FLASH COVER COLORS



RIALTO LSX

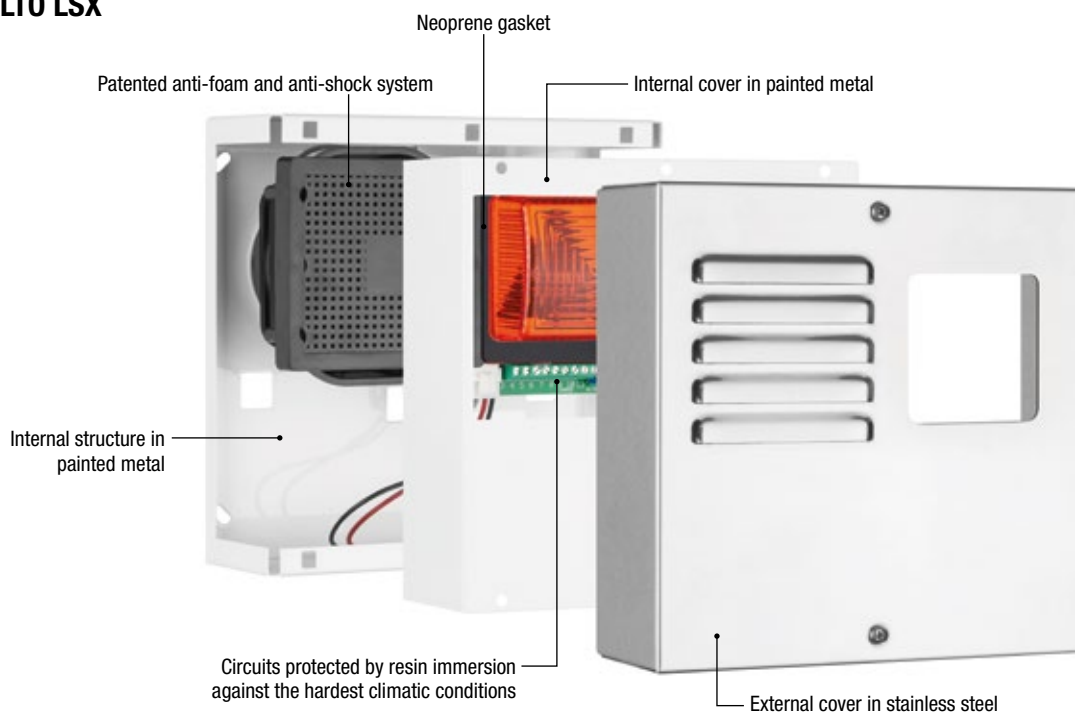



UNITS/PACK

RIALTO L

SECURITY 3° ▶ 13.8 Vdc self-powered sounder in painted metal with LED flashing unit. 6

RIALTO LS

SECURITY 3° ▶ 13.8 Vdc self-powered sounder in painted metal with LED flashing unit, anti-foam and anti-shock device. 6

RIALTO X

SECURITY 3° ▶ 13.8 Vdc self-powered sounder with LED flashing unit. External cover in stainless steel. 6

RIALTO LSX

SECURITY 3° ▶ 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device. External cover in stainless steel. 6

DUMMY

▶ Rialto housing only in painted metal cover. 6

INOX DUMMY

▶ Rialto housing only in stainless steel cover. 6

CUSTOMIZATIONS

Extra cost for customized colors (50 pcs. min.)

Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)





INDOOR
ALARM SOUNDERS

WARRANTY
10
YEARS

EN 50131-4

SECURITY
3°

IP GRADE
3X




ABS

**POLY
CARBO
NATE**



MINI GIUDECCA

Multifunction recessed sounder for indoors with two different sounds and high-luminosity LED system for various light scenarios.

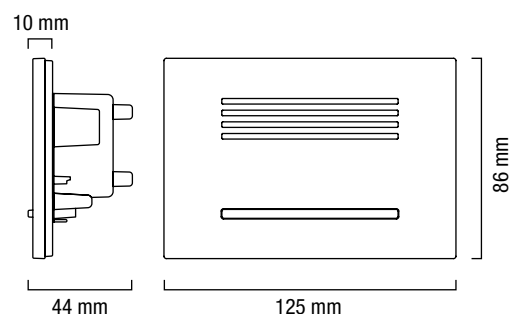

EXTERNAL COVER COLORS



Matt white

Matt grey
Optional color

Matt black
Optional color


RECESSED MOUNTING

- Removable terminal block to make LED wiring easier
- Recessed mounting kit
- Snap-fit cover fixing

MINI GIUDECCA L


3-function high-luminosity LED module:

- System ON
- Walkway light
- Courtesy light

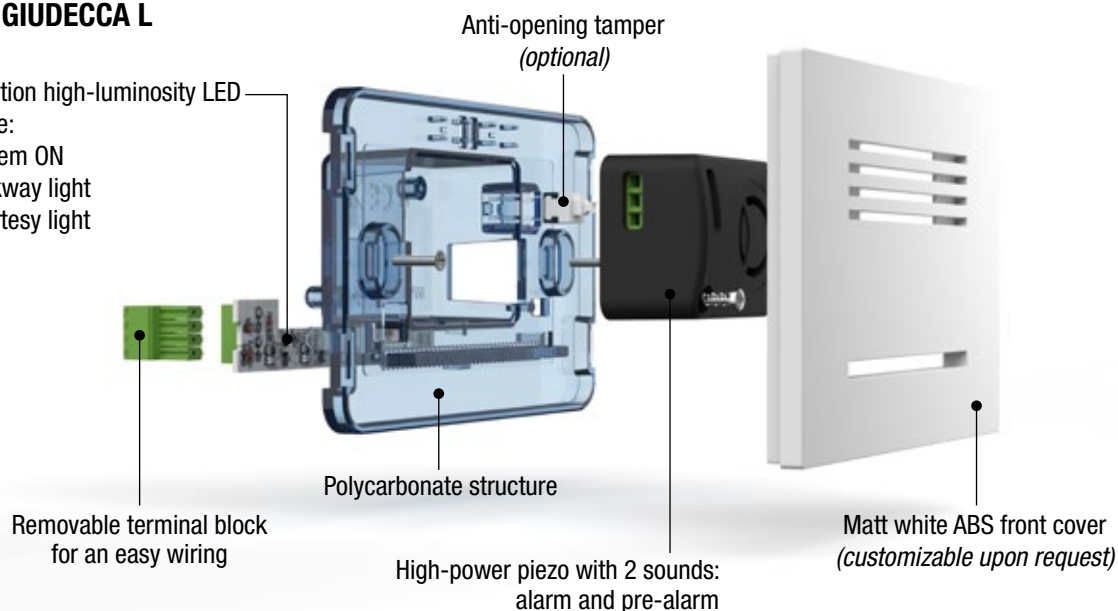




FLUSH-MOUNTING BOX *(optional)*

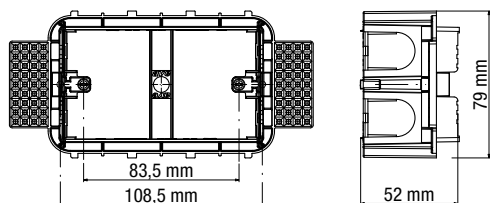

**CUSTOMIZATIONS
UPON REQUEST**

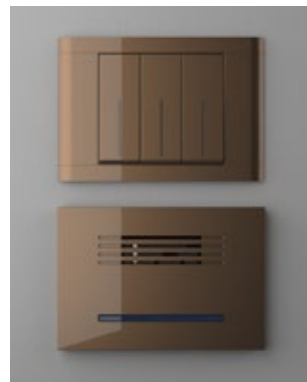

UNITS/PACK

MINI GIUDECCA



► 9-15 Vdc piezoelectric recessed indoor sounder with high-level sound for alarm and low-level sound for pre-alarm. ABS front cover. Available colors: matt white.

2

MINI GIUDECCA L



► 9-15 Vdc piezoelectric recessed indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm. 3-function high-luminosity LED module. ABS front cover. Available color: matt white.

2

ACCESSORIES

EXTERNAL COVER	External cover - Painted ABS external cover. Available colors: matt black, matt grey.	2
LED MODULE	Fixed light LED module.	10
TAMPER	Anti-opening tamper.	10
MOUNTING KIT	Recessed mounting kit for brick and plasterboard walls.	2

WARRANTY
10
YEARS



SECURITY
3°

IP GRADE
4X




TR

ABS



MINI DOGE

Compact and elegant indoor sounder with new blue LED for courtesy-light function.



EXTERNAL COVER COLORS



Shiny white

* Grey

FLASH COVER COLORS



Orange

Light blue

Smoke grey

NEW BLUE LED
for courtesy-light function



MINI DOGE

Integrated piezo high-power emitter



MINI DOGE AL

Integrated battery for A and AL models



Anti-opening and anti-removal tamper


Sophisticated microprocessor circuit

LED flashing unit for A and AL models for courtesy light-function and alarm system arming/disarming signaling




UNITS/PACK


MINI DOGE

-  ► 13.8 Vdc piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm. 20


MINI DOGE L

-  ► 13.8 Vdc piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 20

MINI DOGE A

-  ► 13.8 Vdc self-supplied piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm. 8.4 Vdc 800 mA Ni-Mh battery included. 20

MINI DOGE AL

-  ► 13.8 Vdc self-supplied piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 8.4 Vdc 800 mA Ni-Mh battery included. 20

CUSTOMIZATIONS

* Extra cost for grey painting

Extra cost for customized colors (50 pcs min.)

WARRANTY
10
YEARS



SECURITY
3°

IP GRADE
4X




TR

ABS



MINI HEMA

Sounder with small dimension and new blue LED for courtesy-light function. It is suitable for any settings offering design and protection.

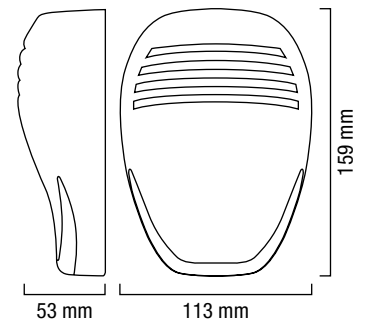

EXTERNAL COVER COLOR



Matt white

FLASH COVER COLORS



Light blue

Smoke grey

NEW BLUE LED for courtesy-light function



MINI HEMA

Integrated piezo high-power emitter

External cover in ABS



Sophisticated microprocessor circuit

Anti-opening and anti-removal tamper

MINI HEMA AL

Integrated battery for A and AL models



LED flashing unit for A and AL models for courtesy light-function and alarm system arming/disarming signaling



UNITS/PACK

MINI HEMA

- SECURITY 3°** ▶ 13.8 Vdc piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm. 20

MINI HEMA L

- SECURITY 3°** ▶ 13.8 Vdc piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 20

MINI HEMA A

- SECURITY 2°** ▶ 13.8 Vdc self-supplied piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm. 8.4 Vdc 170 mA Ni-Mh battery included. 20

MINI HEMA AL

- SECURITY 2°** ▶ 13.8 Vdc piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 8.4 Vdc 170 mA Ni-Mh battery included. 20

CUSTOMIZATIONS

Extra cost for customized colors (50 pcs min.)

WARRANTY
10
YEARS



SECURITY
3°

IP GRADE
4X




TR

ABS



MINI MARINA

Tiny and stylish indoor sounder with new blue LED for courtesy-light function allowing an aesthetic continuity with its outdoor version.




EXTERNAL COVER COLOR



Matt white

FLASH COVER COLORS



Light blue

Smoke grey

NEW BLUE LED for courtesy-light function



MINI MARINA

Integrated piezo high-power emitter

External cover in ABS



Sophisticated microprocessor circuit

Anti-opening and anti-removal tamper

MINI MARINA AL

Integrated battery for A and AL models



LED flashing unit for A and AL models for courtesy light-function and alarm system arming/disarming signaling



UNITS/PACK

MINI MARINA

- | | | |
|---|--|----|
| <div style="border: 1px solid black; padding: 2px; display: inline-block;"> <small>SECURITY</small>
 3° </div> | ▶ 13.8 Vdc piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm. | 20 |
|---|--|----|

MINI MARINA L

- | | | |
|---|--|----|
| <div style="border: 1px solid black; padding: 2px; display: inline-block;"> <small>SECURITY</small>
 3° </div> | ▶ 13.8 Vdc piezoelectric indoor sounder with high LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. | 20 |
|---|--|----|

MINI MARINA A

- | | | |
|---|---|----|
| <div style="border: 1px solid black; padding: 2px; display: inline-block;"> <small>SECURITY</small>
 2° </div> | ▶ 13.8 Vdc self-supplied piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm. 8.4 Vdc 170 mA Ni-Mh battery included. | 20 |
|---|---|----|

MINI MARINA AL

- | | | |
|---|--|----|
| <div style="border: 1px solid black; padding: 2px; display: inline-block;"> <small>SECURITY</small>
 2° </div> | ▶ 13.8 Vdc piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 8.4 Vdc 170 mA Ni-Mh battery included. | 20 |
|---|--|----|

CUSTOMIZATIONS

Extra cost for customized colors (50 pcs min.)

WARRANTY
10
YEARS



SECURITY
3°

IP GRADE
4X



TR

ABS




MINI MURANO

Sounder with small dimension and new blue LED for courtesy-light function. Combines award-winning design with *user-friendly* technology.

security&safety
award 2010

security innovation

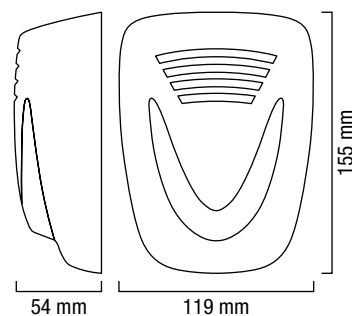

EXTERNAL COVER COLOR



Shiny white

FLASH COVER COLORS



Orange

Light blue

Smoke grey

NEW BLUE LED for courtesy-light function



MINI MURANO

Integrated piezo high-power emitter



Sophisticated microprocessor circuit

MINI MURANO AL

Integrated battery for A and AL models



LED flashing unit for A and AL models for courtesy light-function and alarm system arming/disarming signaling

Anti-opening and anti-removal tamper



UNITS/PACK

MINI MURANO

- SECURITY 3°** ▶ 13.8 Vdc piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm. 20

MINI MURANO L

- SECURITY 3°** ▶ 13.8 Vdc piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 20

MINI MURANO A

- SECURITY 2°** ▶ 13.8 Vdc self-supplied piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm. 8.4 Vdc 170mA Ni-Mh battery included. 20

MINI MURANO AL

- SECURITY 2°** ▶ 13.8 Vdc self-supplied piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 8.4 Vdc 170 mA Ni-Mh battery included. 20

CUSTOMIZATIONS

Extra cost for customized colors (50 pcs. min.)

WARRANTY
10 YEARS



SECURITY
3°

IP GRADE
4X




TR

ABS



MINI HOLA

Indoor sounder with a linear design and high performances, equipped with a blue LED for courtesy light function.



EXTERNAL COVER COLORS



Shiny white

* Matt white

* Matt grey

FLASH COVER COLORS



Orange

Light blue

NEW BLUE LED
for courtesy-light function



MINI HOLA

Integrated piezo high-power emitter



Sophisticated microprocessor circuit

MINI HOLA AL

Integrated battery for A and AL models




LED flashing unit for A and AL models for courtesy light-function and alarm system arming/disarming signaling

Anti-opening and anti-removal tamper




UNITS/PACK


MINI HOLA

-  ► 13.8 Vdc piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm. 20


MINI HOLA L

-  ► 13.8 Vdc piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 20

MINI HOLA A

-  ► 13.8 Vdc self-supplied piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm. 8.4 Vdc 800 mA Ni-Mh battery included. 20

MINI HOLA AL

-  ► 13.8 Vdc self-supplied piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 8.4 Vdc 800 mA Ni-Mh battery included. 20

CUSTOMIZATIONS

* Extra cost for matt white and matt grey painting

Extra cost for customized colors (50 pcs. min.)

WARRANTY
10
YEARS

SECURITY
3°

IP GRADE
3X




TR

ABS



SP200

Essential and compact indoor sounder perfect for 3-module flush-mounting box.

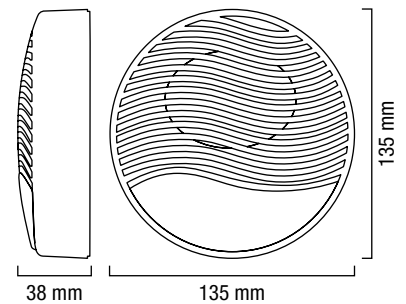

EXTERNAL COVER COLOR



White

FLASH COVER COLOR



Orange

UNITS/PACK

SP200



13.8 Vdc piezoelectric indoor sounder with high-level sound for alarm and low-level sound for pre-alarm. Possibility of application in 503 box.

20

SP200 L



13.8 Vdc piezoelectric indoor sounder with LED flashing unit, high-level sound for alarm and low-level sound for pre-alarm. Possibility of application in 503 box.

20








FIRE AND EVACUATION *SOUNDERS*



DOGE F24

Self-powered outdoor fire alarm sander, capable of integrating high performance with any kind of alarm control unit.

EN 54-3 APPROVED



EXTERNAL COVER COLOR



Shiny red

FLASH COVER COLOR



Orange

		UNITS/PACK
DOGE F24		
► Outdoor self-powered 24 Vdc fire alarm sander with LED flashing unit. External cover in painted ABS VØ. EN 54-3 certified.		6
ACCESSORIES		
EMBOSSSED STICKER	"FIRE" embossed sticker (the pack includes 10 pc). Other languages upon request.	10






TRIADE F24

Self-powered outdoor sounder for fire alarm, able to offer structural strenght and guaranteed performances.

EN 54-3 APPROVED

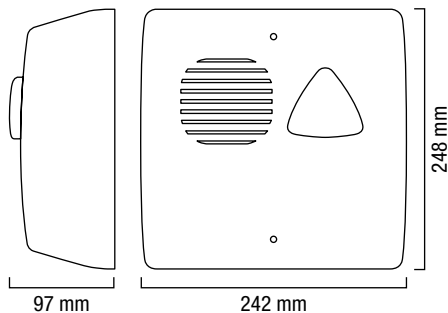

EXTERNAL COVER COLOR



Shiny red

FLASH COVER COLOR



Orange

TRIADE F24

- Outdoor self-powered 24 Vdc fire alarm sounder with LED flashing unit. External cover in painted ABS VØ. EN 54-3 certified.

6

UNITS/PACK

ACCESSORIES

EMBOSSSED STICKER	"FIRE" embossed sticker (the pack includes 10 pc). Other languages upon request.	10
-------------------	---	----






MOSE F24EN

Remotely-supplied outdoor sounder for fire and evacuation alarm, suitable for the aesthetic and functional valorization of any installation.

EN 54-3 APPROVED



EXTERNAL COVER COLOR



Shiny red

FLASH COVER COLOR



Orange

- ✓ Settable low-consumption sounders
- ✓ **Remotely-supplied (batteries not required)**
- ✓ Sound synchronism among all indoor and outdoor sounders
- ✓ 3 settable and independent alarm inputs with inversion trigger (certified) or negative-giving
- ✓ 6 sounds for alarm, pre-alarm and evacuation, certified for different Countries
- ▶ **CONSUMPTION FROM 60 mA TO 400 mA, PROGRAMMABLE FROM DIP SWITCH.**

UNITS/PACK

MOSE F24EN

- ▶ Remotely-supplied **(batteries not required)** 24 Vdc outdoor sounder. Settable consumption from 60 mA to 400 mA. External cover in painted ABS V0. 3 settable and independent alarm inputs. EN 54-3 certified.

ACCESSORIES

EMBOSSSED STICKER	"FIRE" embossed sticker (the pack includes 10 pc). Other languages upon request.	10
-------------------	---	----






MURANO F24EN

Outdoor **remotely-supplied** fire alarm and evacuation sounder, which integrates design and performances, perfectly suitable to all control panels.

EN 54-3 APPROVED



EXTERNAL COVER COLOR



Shiny red

FLASH COVER COLOR



Orange

- ✓ Settable low-consumption sounders
- ✓ **Remotely-supplied (batteries not required)**
- ✓ Sound synchronism among all indoor and outdoor sounders
- ✓ 3 settable and independent alarm inputs with inversion trigger (certified) or negative-giving
- ✓ 6 sounds for alarm, pre-alarm and evacuation, certified for different Countries
- ▶ **CONSUMPTION FROM 60 mA TO 400 mA, PROGRAMMABLE FROM DIP SWITCH.**

MURANO F24EN

- ▶ Remotely-supplied (**batteries not required**) 24 Vdc outdoor sounder. Settable consumption from 60 mA to 400 mA. External cover in painted ABS V0. 3 settable and independent alarm inputs. EN 54-3 certified.

UNITS/PACK

5

ACCESSORIES

EMBOSSSED STICKER	"FIRE" embossed sticker (the pack includes 10 pc). Other languages upon request.	10
-------------------	---	----






HOLA F24EN

Outdoor **remotely-supplied** fire alarm and evacuation sounder, with a versatile design, suitable to any kind of customization.

EN 54-3 APPROVED



EXTERNAL COVER COLOR



Shiny red

FLASH COVER COLOR



Orange

- ✓ Settable low-consumption sounders
- ✓ **Remotely-supplied (batteries not required)**
- ✓ Sound synchronism among all indoor and outdoor sounders
- ✓ 3 settable and independent alarm inputs with inversion trigger (certified) or negative-giving
- ✓ 6 sounds for alarm, pre-alarm and evacuation, certified for different Countries

▶ **CONSUMPTION FROM 60 mA TO 400 mA, PROGRAMMABLE FROM DIP SWITCH.**

UNITS/PACK

HOLA F24EN

- ▶ Remotely-supplied (batteries not required) 24 Vdc outdoor sounder. Settable consumption from 60 mA to 400 mA. External cover in painted ABS V0. 3 settable and independent alarm inputs. EN 54-3 certified.

5

ACCESSORIES

EMBOSSSED STICKER

"FIRE" embossed sticker (the pack includes 10 pc).
Other languages upon request.

10





MINI DOGE F24


Indoor fire alarm sounder with versatile design and certified technology.

EN 54-3 APPROVED

EXTERNAL COVER COLOR



Shiny red



MINI DOGE FL24

Indoor fire alarm sounder with integrated LED system for increase the alert function.

EN 54-3 APPROVED

EXTERNAL COVER COLOR




Shiny red

FLASH COVER COLOR



Orange



UNITS/PACK

MINI DOGE F24

- Indoor remotely-supplied 24 Vdc fire alarm sounder, low consumption. External cover in ABS VØ. EN 54-3 certified.

20

MINI DOGE FL24

- Indoor remotely-supplied 24 Vdc fire alarm sounder with LED flashing unit, low consumption. External cover in ABS VØ. EN 54-3 certified.

20






DOGE EV

Self-powered outdoor evacuation sounder which adds to the optical LED signaling the possibility to integrate a high linearity vocal module with pre-recorded and customizable messages.

EN 50849 COMPLIANT



EXTERNAL COVER COLOR



Shiny red

FLASH COVER COLOR



Orange

	UNITS/PACK
DOGE EV12 ► 13.8 Vdc self-powered evacuation sounder with LED flashing unit.	6
DOGE EV24 ► 24 Vdc self-powered evacuation sounder with LED flashing unit.	6
DOGE EV230 ► 230 Vdc self-powered evacuation sounder with LED flashing unit.	6
DOGE EV VOCAL ► 13.8 Vdc self-powered evacuation sounder with LED flashing unit and vocal module.	6

ACCESSORIES


EMBOSSSED STICKER	"EVACUATION ALARM" embossed sticker (the pack includes 10 pc). Other languages upon request	10
-------------------	--	----






CI PLEXIGLASS

Plexiglass wall frame for fire signaling. Elegant design, equipped with hole for the insertion of the sounder.
“Fire Alarm” serigraphy on both sides that allows the right/left mounting according to the need.

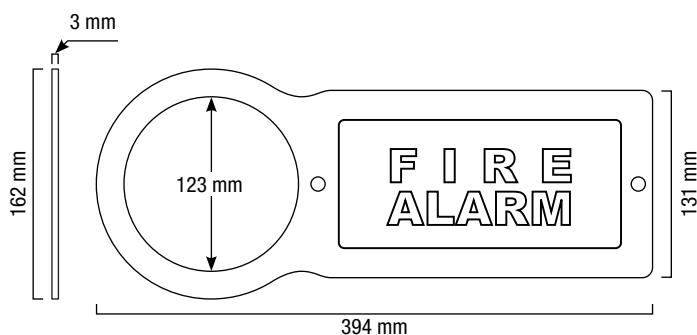

SPACERS KIT INCLUDED

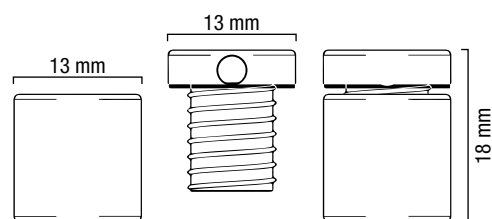

CI PLEXIGLASS

- Plexiglass wall cartel for fire signaling.

UNITS/PACK PRICE PER UNIT €

6

CUSTOMIZATIONS

Custom serigraphy








SOUNDERS AND PANELS
FOR EMERGENCY EXIT



HOLA UECP

Evacuation sounder for controlling up to 3 emergency exit doors, integrated multicolor LED system and possibility of management via mechanical key, wireless receiver or wireless keypad.



EXTERNAL COVER COLORS



Matt white

FLASH COVER COLORS




Light blue


Polycarbonate label with serigraphy:
"EMERGENCY EXIT" included.

POWER SUPPLY TL 1207 (optional)

500 mA power supply with 2 outputs:
12 Vdc and 13.8 Vdc for lead battery
rechargers.




included



TCH MECHANICAL KEY (optional)

Two positions mechanical key with
250 Vac 3 A contact.



ONDA DIGITAL W KEYPAD

In HOLA UECP KIT the wireless
receiver is mounted on sounder.

UNITS/PACK

HOLA UECP

- ▶ 13.8 Vdc self-supplied sounder for door control/emergency exit with 3 different settable alarm inputs. TL 1207 power supply not included.

1

KIT HOLA UECP

- ▶ KIT HOLA UECP + wireless rolling code keypad "ONDA DIGITAL W" + wireless receiver. TL 1207 power supply not included.

1

ACCESSORIES

TCH MECHANICAL KEY	Mechanical key for sounders and panels for emergency exit. Two positions and 250 Vac 3 A contact. Possibility to have keys with the same code.	1
TL 1207	Power supply with 230 Vca input and 2 outputs: 12 Vdc and 13.8 Vdc for lead battery rechargers. Max output current: 500 mA.	1



WARRANTY
10
YEARS

IP GRADE
33

2




TM

ABS
ANTI
UV



TRIADE UE

Sounder for emergency exit doors with LED system and high-resistance structure.

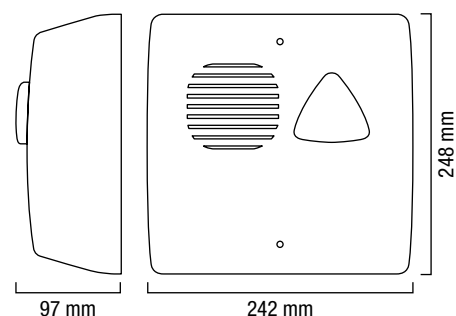

EXTERNAL COVER COLORS




White

FLASH COVER COLORS



Orange

"EMERGENCY EXIT"
embossed sticker included



TCH MECHANICAL KEY

Two positions and 250 Vac 3 A contact mechanical key.

UNITS/PACK

TRIADE UE

- Self-powered sounder 13.8 Vdc for emergency exit with flashing LED for system state signaling and steady LED for alarm memory. TCH mechanical key included. **Possibility to have keys with the same code.** TL 1207 power supply not included.

6

ACCESSORIES

TL 1207

Power supply with 230 Vca input and 2 outputs: 12 Vdc and 13.8 Vdc for lead battery rechargers. Max output current: 500 mA.

1





TPUS

Optical-acoustic panel for emergency exit doors able to manage up to 3 emergency doors, with high luminosity LED system and low consumption.



TPUS

- ▶ 12 Vdc/24 Vdc optical-acoustic panel for emergency exit doors. 3 inputs and one A relay output. Low profile TCH mechanical key for exclusion and/or reset included. Polycarbonate label with serigraphy customizable on demand. Possibility of flush installation. **Possibility to have keys with the same code.**

UNITS/PACK

20

TPUSA

- ▶ 12 Vdc/24 Vdc optical-acoustic panel for emergency exit doors. Equipped with a 230 Vac power supply, rechargeable 9.6 Vdc 1500 mA Ni-Mh batteries included. Technical data as per TPUS. TCH mechanical key included. **Possibility to have keys with the same code.**

20

ACCESSORIES

LABEL Customized polycarbonate label with serigraphy.


ALLARME
USCITA DI SICUREZZA





POWER SUPPLIES *MULTIFUNCTION TECHNOLOGY*


SPECIAL POWER SUPPLIES



IP GRADE
67

TL 1207

Power supply with 230 Vca input and 2 outputs: 12 Vdc and 13.8 Vdc for lead battery rechargers. Max output current: 500 mA.



IP GRADE
67

AMPEROTTO

Power supply with 230 Vca input and 12 Vdc 1.5 A output for CCTV and LED lights, with hard epoxy resin. Smallest size in the world - with cables and connector.

UNITS/PACK

TL 1207

- Power supply with 230 Vca input and 2 outputs: 12 Vdc and 13.8 Vdc for lead battery rechargers. Max output current: 500 mA.

1

AMPEROTTO

- Power supply with 230 Vca input and 12 Vdc 1.5 A output for CCTV and LED lights. For outdoor use. IP 67 protection. 1 output jack DC connector included.


1

13.8 VDC AND 27.6 VDC SPECIAL POWER SUPPLIES FOR INTRUSION AND CCTV SYSTEM




TL 132

13.8 Vdc 2 A power supply. 1 output for battery recharge and 1 independent output. Linear regulation with toroidal transformer. Red LED for overload indication.

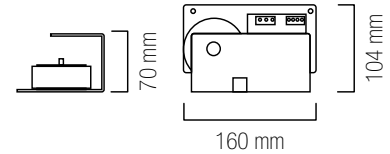


TL 133

13.8 Vdc 3 A power supply. 1 output for battery recharge and 1 independent output. Linear regulation with toroidal transformer. LED ammeter and overload signaling.

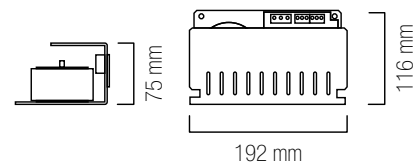

TL 135


13.8 Vdc 5 A power supply. 1 output for battery recharge and 3 independent outputs. Linear regulation with toroidal transformer. LED ammeter and overload signaling.

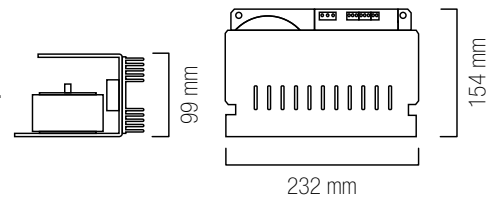

	UNITS/PACK
TL 132 ► 13.8 Vdc 2 A power supply with toroidal transformer. Input: 230 Vac. 1 output for battery recharge and 1 independent output.	1
TL 133 ► 13.8 Vdc 3 A power supply with toroidal transformer. Input: 230 Vac. 1 output for battery recharge and 2 independent outputs.	1
TL 135 ► 13.8 Vdc 5 A power supply with toroidal transformer. Input: 230 Vac. 1 output for battery recharge and 3 independent outputs.	1

STABILIZED POWER SUPPLIES IN BOX

Power supply unit for intrusion alarm systems equipped with control board on the front panel, finished with an elegant LED backlit synoptic indicator. Protected against polarity inversion and short circuit, with input-output protection fuses.

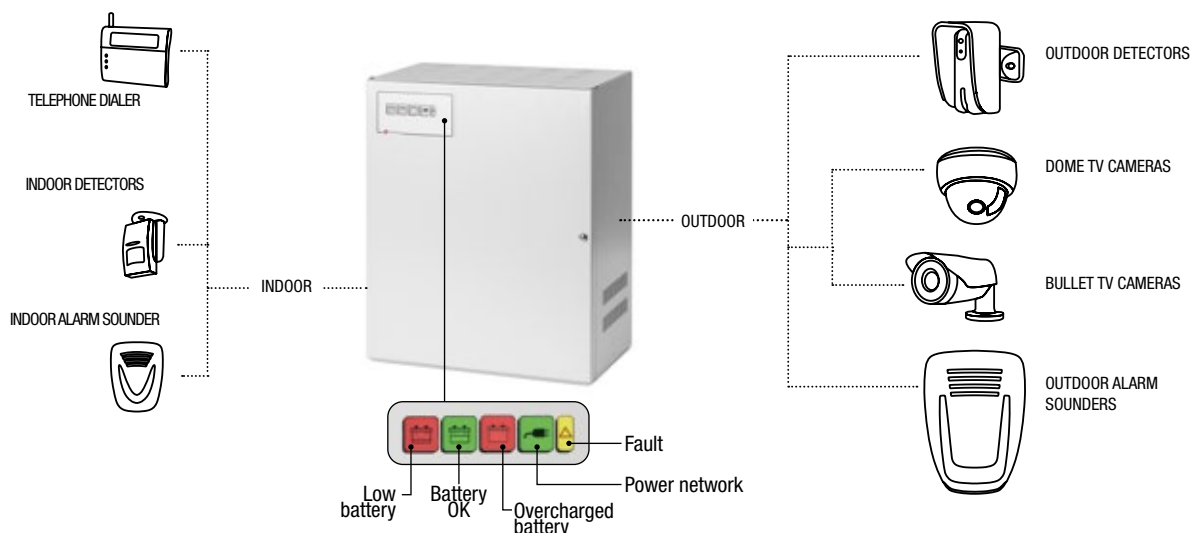

UNITS/PACK



TUL 133 EN - EN 50131-6 certified, security grade 3.

- ▶ 13.8 Vdc 3.5 A linear power supply in painted metal box with toroidal transformer. Input: 230 Vac. 1 output for battery recharge and 3 independent outputs. **Certificate EN 50131-6, security grade 3.** LED ammeter with overload indication. Battery: max 1 of 38 Ah. Dimensions: (HxLxD) 310x373x175 mm.

1

TUL 132

- ▶ 13.8 Vdc 2 A linear power supply in painted metal box with toroidal transformer. Input: 230 Vac. 1 output for battery recharge and 1 independent outputs. Red LED for overload indication. Housing for 1 7 Ah battery. Box TB1.

1

TUL 133

- ▶ 13.8 Vdc 3 A linear power supply in painted metal box with toroidal transformer. Input: 230 Vac. 1 output for battery recharge and 2 independent outputs. Red LED for overload indication. Housing for 2 7 Ah batteries. Box TB2.

1

TUL 135

- ▶ 13.8 Vdc 5 A linear power supply in painted metal box with toroidal transformer. Input: 230 Vac. 1 output for battery recharge and 3 independent outputs. Red LED for overload indication. Housing for 2 7 Ah batteries or 1 17 Ah batteries or 1 38 Ah battery. Box TB3.


1

OUTDOOR POWER SUPPLIES IN WATERPROOF BOX

Power supplies for CCTV, ideal for installations in unprotected outdoor environments.
Possibility to realize products with customized power or boxes on request.



Electronic circuit with signaling LED of interrupted fuse on each output (LED off)

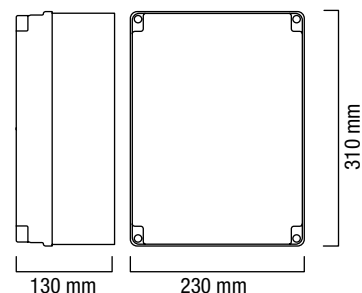

◆ Until supplies last

UNITS/PACK

IP GRADE
56

TL 2410 IP ◆

- ▶ 24 Vac 100 VA, current 3.5 A max outdoor power supply for CCTV systems in IP 56 plastic box. Input: 230 Vac. 6 independent outputs protected by fuses.


1

IP GRADE
56

TL 2415 IP

- ▶ 24 Vac 100 VA, current 5 A max outdoor power supply for CCTV systems in IP 56 plastic box. Input: 230 Vac. 6 independent outputs protected by fuses.

1

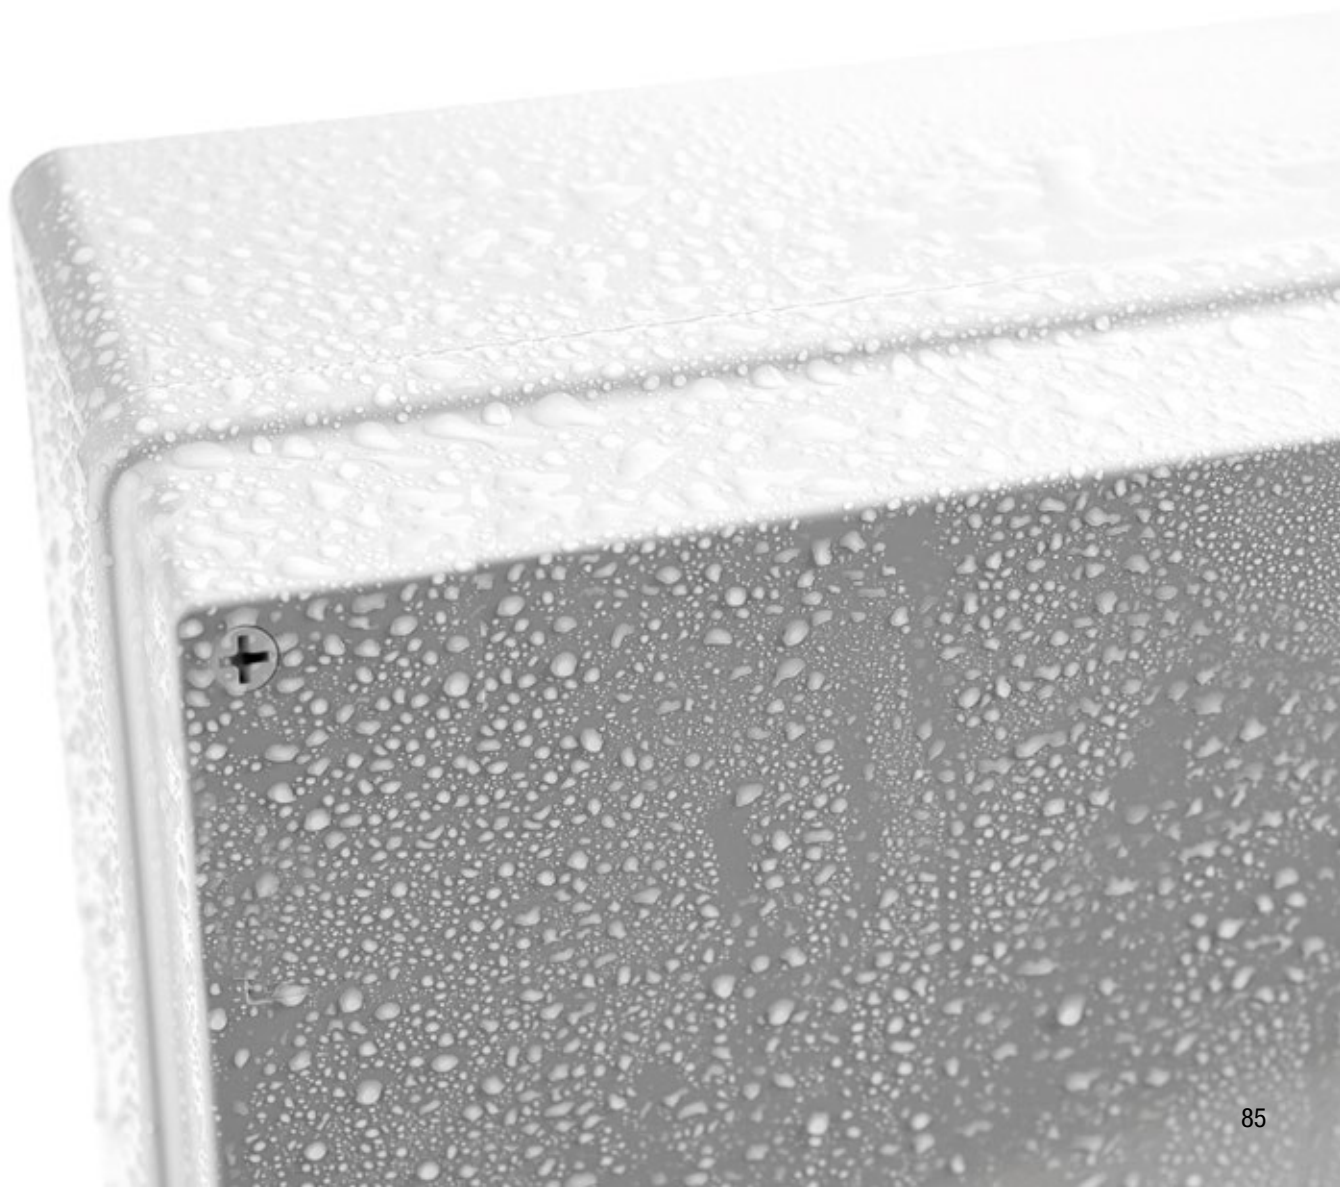

CCTV SWITCHING POWER SUPPLIES



TSWs are adjustable switching power supplies for CCTV, domotics and LED lighting systems, with integrated charger for backup batteries. These high power devices are placed in a compact box and are able to supply up to 8 independent cameras. TSWs enable output voltage setting in order to compensate cable voltage drop in medium-to-big CCTV systems. **Housing for 7 Ah, 17 Ah or 38 Ah batteries depending on the model** - metal box complete with anti-opening tamper.

UNITS/PACK

TSW 155

- ▶ Adjustable at 12.0/12.8/13.8 Vdc, 5 A switching power supply for CCTV, domotics installations, LED illuminators with battery-recharge. Input: 230 Vac. 5 outputs, of which 1 for battery-recharge. TB1 box. 1

TSW 155 C

- ▶ Adjustable at 12.0/12.8/13.8 Vdc, 5 A switching power supply for CCTV, domotics installations, LED illuminators, battery-recharge and synoptic control board. Output for anomalies and mains failure. Input: 230 Vac. 5 outputs, of which 1 for battery-recharge. TB1 box. 1

TSW 157

- ▶ Adjustable at 12.0/12.8/13.8 Vdc, 7 A switching power supply for CCTV, domotics installations, LED illuminators with battery-recharge. Input: 230 Vac. 9 outputs, of which 1 for battery-recharge. TB2 box. 1

TSW 157 C

- ▶ Adjustable at 12.0/12.8/13.8 Vdc, 7 A switching power supply for CCTV domotics installations, LED illuminators, battery-recharge and synoptic control board. Output for anomalies and mains failure. Input: 230 Vac. 9 outputs, of which 1 for battery-recharge. TB2 box. 1


TSW 1510

- ▶ Switching power supply contained in painted metal box. Input: 230 Vac - output: 12-14 Vdc, 10 A. 1 output for battery recharge and 8 outputs in two different groups. Perfect for CCTV, domotics installations, LED illuminators. Output for anomalies and mains failure. TB3 box. 1


TSW 1510 C

- ▶ Switching power supply contained in painted metal box. Input: 230 Vac - output: 12-14 Vdc, 10 A. 1 output for battery recharge and 8 outputs in two different groups. Frontal synoptic control board. Perfect for CCTV, domotics installations, LED illuminators. Output for anomalies and mains failure. TB3 box. 1

12 VAC STABILIZED TENSION REDUCERS

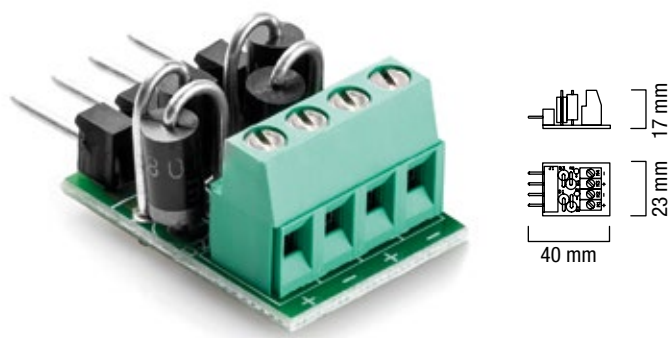

V 12
Voltage reducer from 13.8 Vdc to 12 Vdc for infrared TV cameras and other products.
2 outputs of max 1 Ah each.

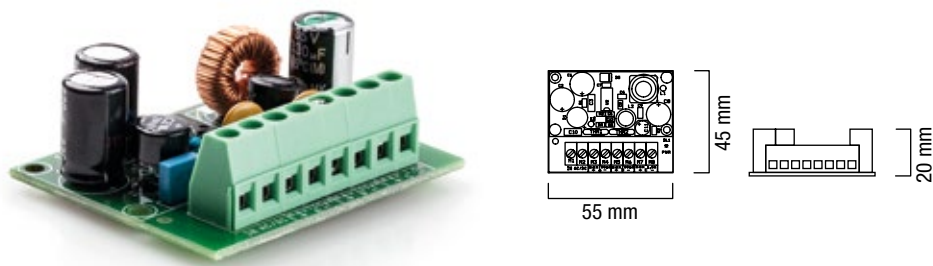

V 4512
16 - 24 Vdc or 17 - 32 Vac voltage reducer with internal stabilizer and signaling LED of reducer activated.
Output: 12 - 13.8 Vdc.

◆ Until supplies last

UNITS/PACK

V12 ◆	
▶ Voltage reducer from 13.8 Vdc to 12 Vdc for infrared TV cameras and other products. 2 outputs of max 1 Ah each.	4

V4512	
▶ 16 - 24 Vdc or 17 - 32 Vac voltage reducer with internal stabilizer and signaling LED of reducer activated. Output: 12 - 13.8 Vdc.	2

POWER SUPPLY **CERTIFIED EN 54-4** FOR FIRE ALARM INSTALLATIONS AND **EN 12101-10** FOR **SMOKE AND HEAT EVACUATION** AND CONTROL SYSTEMS (SHE)



TUL 500 EN - Certified switching power supply with microcontroller supervisory circuit, created to ensure autonomy to fire detection systems and smoke and heat evacuation and control systems. These units are studied to guarantee supply even in case of disconnected battery or output short circuit and protect all the connected devices.

STRENGTHS

Immediate intervention: the power supply is always active. In case of 220 V mains failure, batteries instantly supply power.

Periodic checks of internal resistance and batteries efficiency for assessing their ageing process.

Functional class: A - the power supply is able to work with any type of smoke and heat evacuation and control system.

Possibility to install many power supplies for different lines increases reliability of the system.

CERTIFICATIONS

- ▶ **EN 54-4:1997+A1:2002+A2:2006**
(Fire detection and fire alarm systems. Part 4: Power supplies)
- ▶ **EN 12101-10:2005/AC:2007**
(Smoke and heat evacuation systems. Part 10: Power supplies)

UNITS/PACK

TUL 500 EN

- ▶ 27.6Vdc 5A switching fire power supply contained in painted metal box, with LED ammeter and overload battery signaling. Input: 230 Vac. 4 outputs, of which 1 for battery-recharge. Backlit cover with serigraphy indicating: mains presence, battery status, general failure. EN 54-4 and EN 12101-10 certified. Dimensions: (HxLxD) 310x373x175 mm.

1

EN 54-4

EN 12101-10

FIRE POWER SUPPLIES

EN 54-4 CERTIFIED



TUL 375 EN - TUL 373 EN

Certified power supplies for fire systems with linear regulator (toroidal) able to significantly limit electromagnetic interference. Management with microcontroller, studied to guarantee power supply even with disconnected battery or output short circuit and protect the devices connected thanks to CROWBAR protection.

UNITS/PACK

TUL 375 EN

- ▶ 27.6 Vdc 5 A linear regulator (toroidal) fire power supply contained in painted metal box, with LED ammeter and overload battery signaling. Input: 230 Vac. 4 outputs, of which 1 for battery-recharge. Backlit cover with serigraphy indicating: mains presence, battery status, general failure. EN 54-4 and EN 12101-10 certified. Dimensions: (HxD) 373x310x175 mm.

1

TUL 373 EN

- ▶ 27.6 Vdc 3 A linear regulator (toroidal) fire power supply contained in painted metal box, with LED ammeter and overload battery signaling. Input: 230 Vac. 3 outputs, of which 1 for battery-recharge. Backlit cover with serigraphy indicating: mains presence, battery status, general failure. EN 54-4 certified. Dimensions: (HxD) 373x310x175 mm.

1



BOXES FOR POWER SUPPLIES

Elegant metal box, polyester-powder painting process, equipped with anti-opening tamper.




BOX TB3


BOX TB2

BOX TB1

	UNITS/PACK
TB1 <ul style="list-style-type: none">▶ Metal box for TL 132 with polyester painting and anti-opening tamper. Dimensions: (HxLxD) 265x217x113mm	1
TB2 <ul style="list-style-type: none">▶ Metal box for TL 133 with polyester painting and anti-opening tamper. Dimensions: (HxLxD) 373x282x127mm	1
TB3 <ul style="list-style-type: none">▶ Metal box for TL 135 - TL 373 - TL 375 with polyester painting and anti-opening tamper. Dimensions: (HxLxD) 373x310x175mm	1



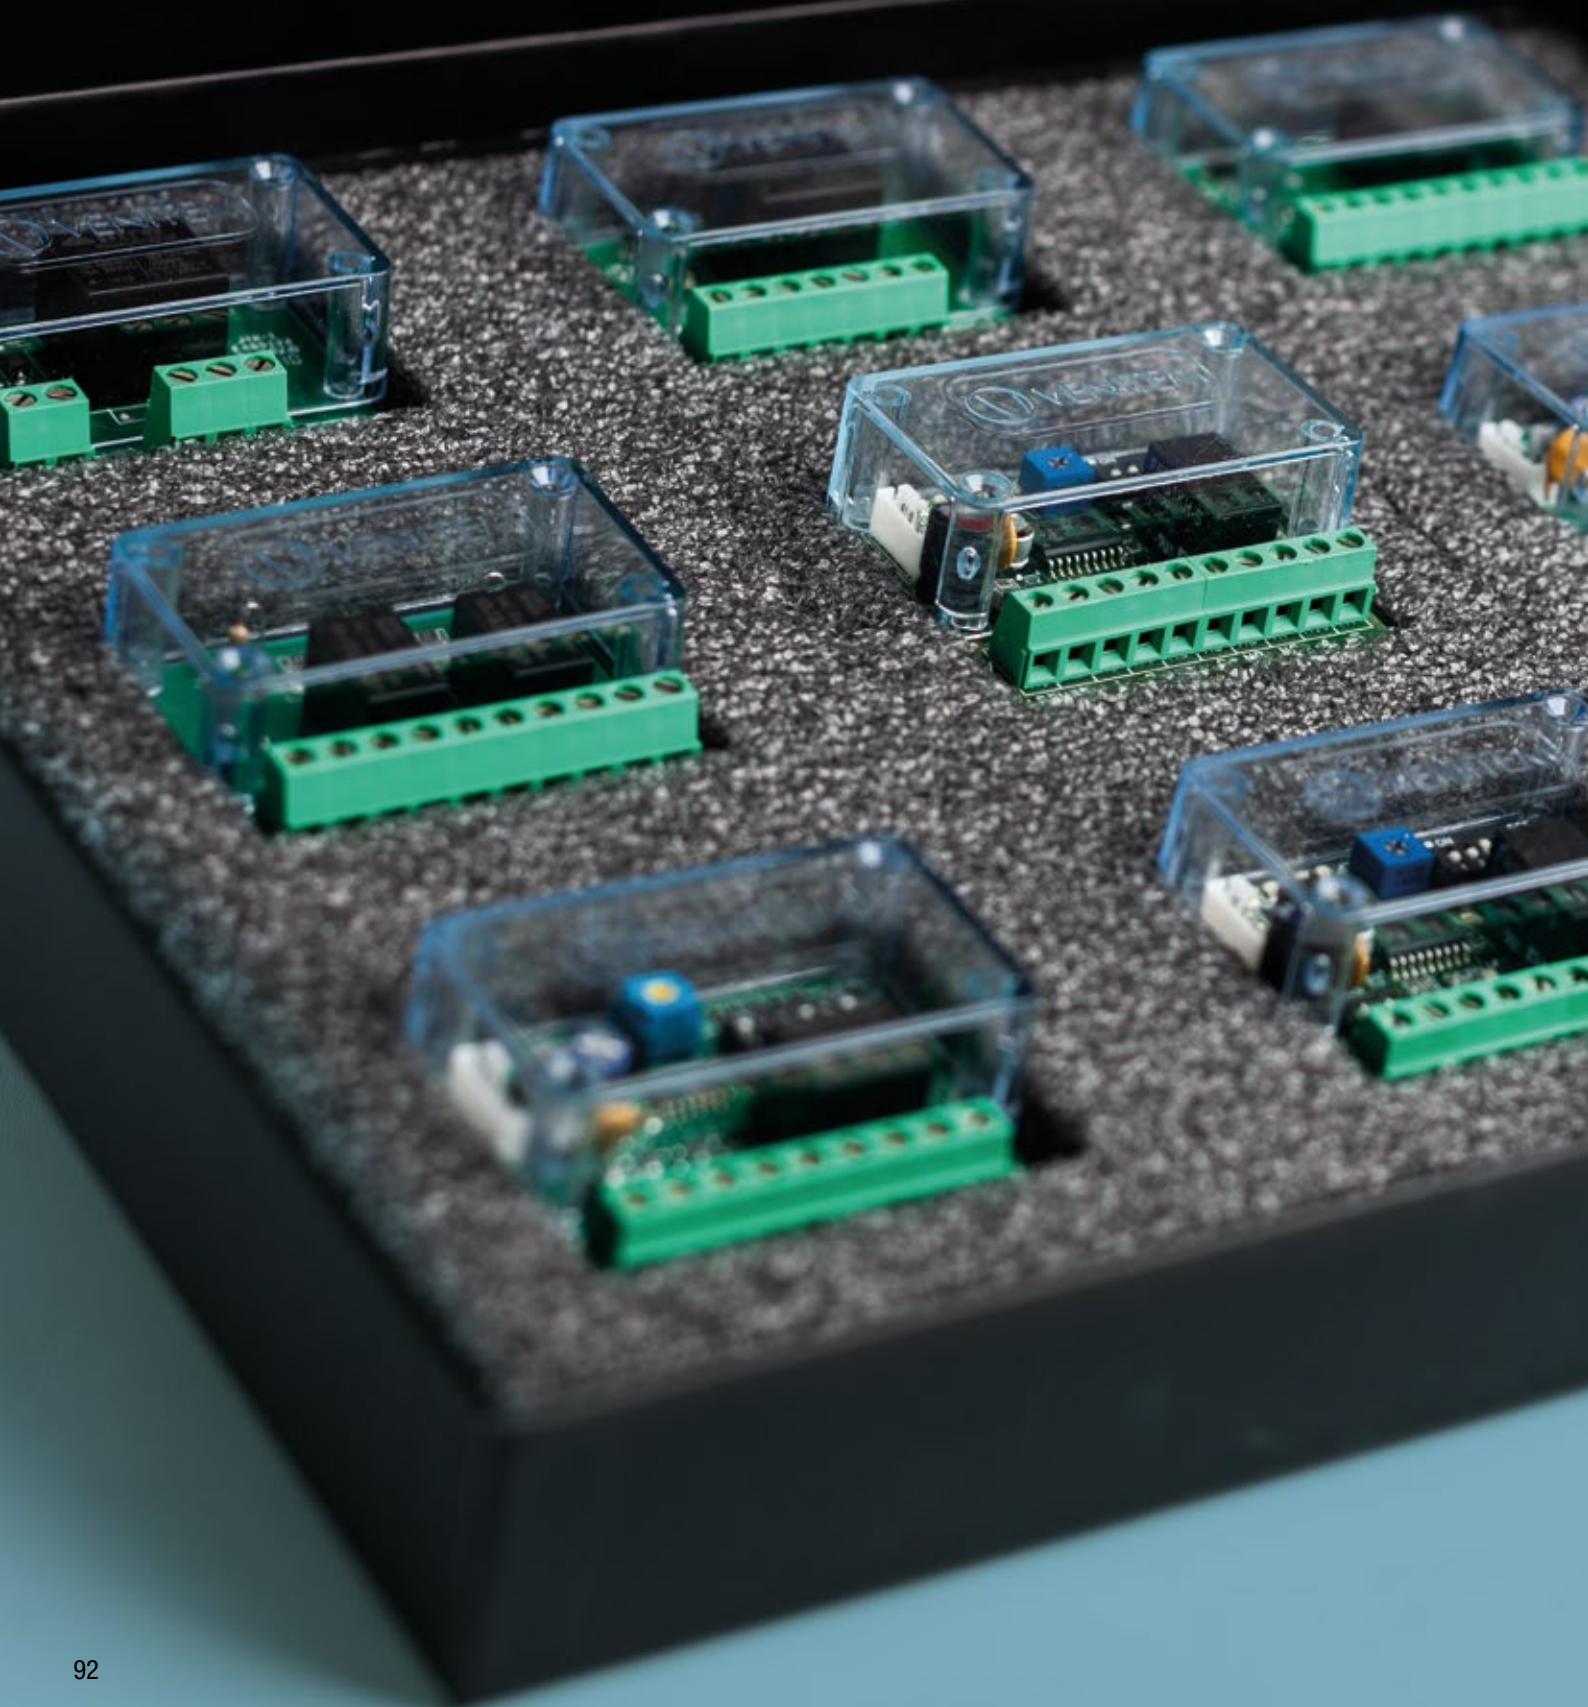

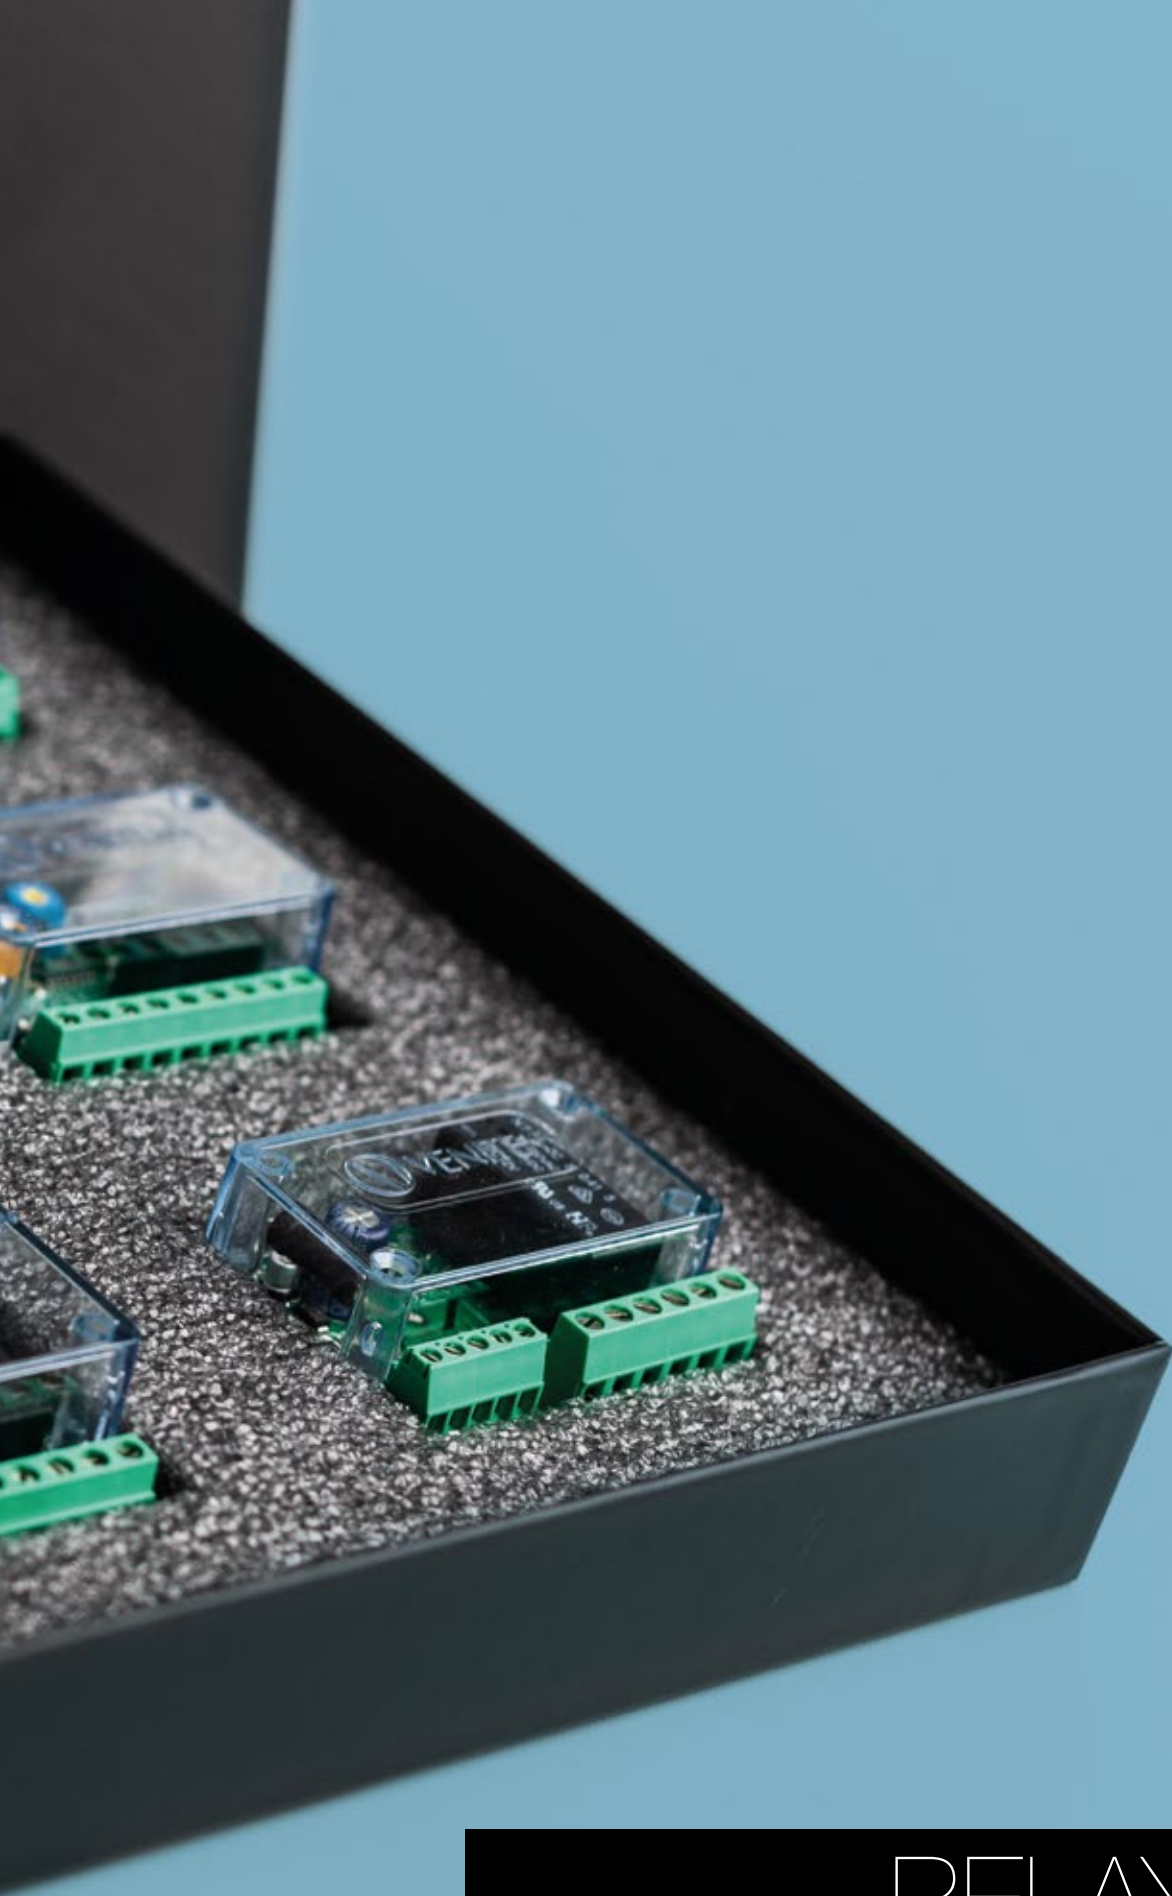

RELAY AND *MULTIFUNCTION BOARDS*

RELAY AND MULTIFUNCTION BOARDS

Relay and multifunction boards with different settings and timing options, for intrusion, CCTV, and home automation. Possibility of installation in complex electrical panels thanks to the functionality of the protective box for DIN track.



FULL RELAY - 12/24 Vdc/Vac relay interface board, 40 mA @ 24 Vdc power supply max consumption. Opto-isolated input 3 - 30 Vdc/Vac max 10 mA. 1 DPDT (Double Pole, Double Throw) output with dry contact with maximum 8 A 250 Vdc/Vac. 2 8 Ah outputs or 1 16 Ah output. Dimensions: (HxLxD) 60x48x26 mm - weight: 48 gr.



RA/T - 12 Vdc low consumption relay interface board for open collector driver with relay output. 1 1 mA input and 1 relay output 3 A. Signalling LED. Dimensions: (HxLxD) 55x45x18 mm - weight: 26 gr.



RA - 12 Vdc relay interface board for open collector driver with relay output. 1 35 mA input and 1 relay output 3 A. Signalling LED. Dimensions: (HxLxD) 55x45x18 mm - weight: 24 gr.



RN 12/24 - 12/24 Vdc relay interface board for open collector with 2 inputs and 2 relay outputs. 2 25 mA inputs and 2 relay outputs a each. Signalling LED. Dimensions: (HxLxD) 55x45x17 mm - weight: 30 gr.



RA/2S - 12 Vdc low consumption relay interface board for open collector with two opto-isolated outputs. 1 mA input and 2 relay outputs 1A each. Signalling LED. Dimensions: (HxLxD) 55x45x17 mm - weight: 26 gr.

BOX

- BOX Customizable box with 9 relay and multifunction boards of your choice.

UNITS/PACK
IN BLISTER

1 BOX

FULL RELAY

- 12/24 Vdc/Vac relay interface board, 40 mA @ 24 Vdc power supply max consumption. Opto-isolated input from 3 to 30 Vdc/Vac max 10 mA. 1 DPDT (Double Pole, Double Throw) output with dry contact with maximum 8 A 250 Vdc/Vac.

1

RA

- 12 Vdc relay interface board with 1 35 mA input and 1 3 A relay output.

2

RA/T

- 12 Vdc low consumption relay interface board with 1 1 mA input and 1 3 A relay output.

2

RA/2S

- 12 Vdc low consumption relay interface board with 1 1 mA input and 2 1 A relay outputs.

2

RN 12/24

- 12/24 Vdc relay interface board with 2 25 mA inputs and 2 1 A relay outputs.

2

DIN BOX

- Protective plastic box for DIN track. Compatible with all our relay and multifunction boards, except for CTT/R.

2

TSP

- Adhesive plastic bracket for relay and multifunction boards.

10




MCX - 12 Vdc multifunction board, 1 contact for rolling shutters, inertial and vibration sensors – 1 1 mA input, 1 1 A output relay – 1 O.C. output. Dimensions: 55x45x18 mm (HxLxD) - weight: 23 gr.



MTT - 12 Vdc multifunction board for all timings – 1 1 mA inputs – 1 1 A relay output – 1 O.C. output. Dimensions: 55x45x18 mm (HxLxD) - weight: 23 gr.



MCV - 12 Vdc multifunction board for rolling shutter and magnetic contacts (up to 4 in total), 1 1 A output and 1 opto-isolated output. Dimensions: 55x45x18 mm (HxLxD) - weight: 25 gr.

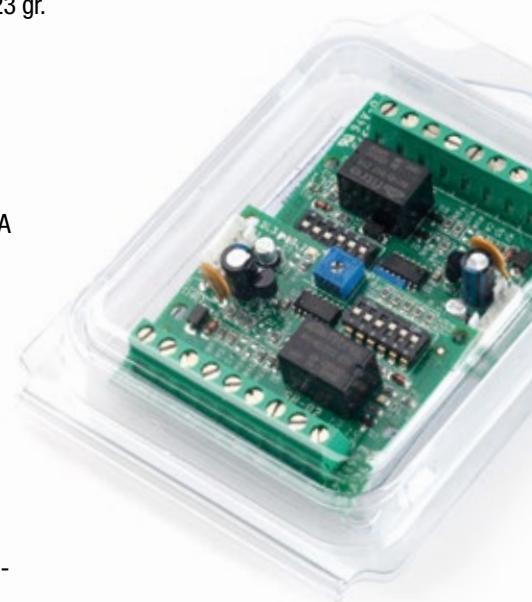

	UNITS/PACK IN BLISTER
MTT <ul style="list-style-type: none"> ▶ 12 Vdc multifunction board for all timings, 1 1 mA inputs, 1 1 A relay output, 1 O.C. output. 	2
MCX <ul style="list-style-type: none"> ▶ 12 Vdc multifunction circuit for rolling-shutter contacts, inertial and vibration sensors – 1 1 mA input, 1 1 A relay output – 1 1 A O.C. output. 	2
MCV <ul style="list-style-type: none"> ▶ 12 Vdc multifunction circuit for rolling shutters and magnetic contacts (up to 4 inputs max). 1 1 A output and 1 opto-isolated output. 	2
DIN BOX <ul style="list-style-type: none"> ▶ Protective plastic box for DIN track. Compatible with all our relay and multifunction boards, except for CTT/R. 	2
TSP <ul style="list-style-type: none"> ▶ Adhesive plastic bracket for relay and multifunction boards. 	10





CONTROL *PANELS*

WARRANTY
10
YEARS

SECURITY
3°

IP GRADE
44



TM



ABS
ANTI
UV




1.2.3



DOGE CT3

A product easy to be installed, perfect for small spaces as campers, garages, scaffolding and basements.




EXTERNAL COVER COLORS



FLASH COVER COLORS



INSTALLATION EXAMPLE

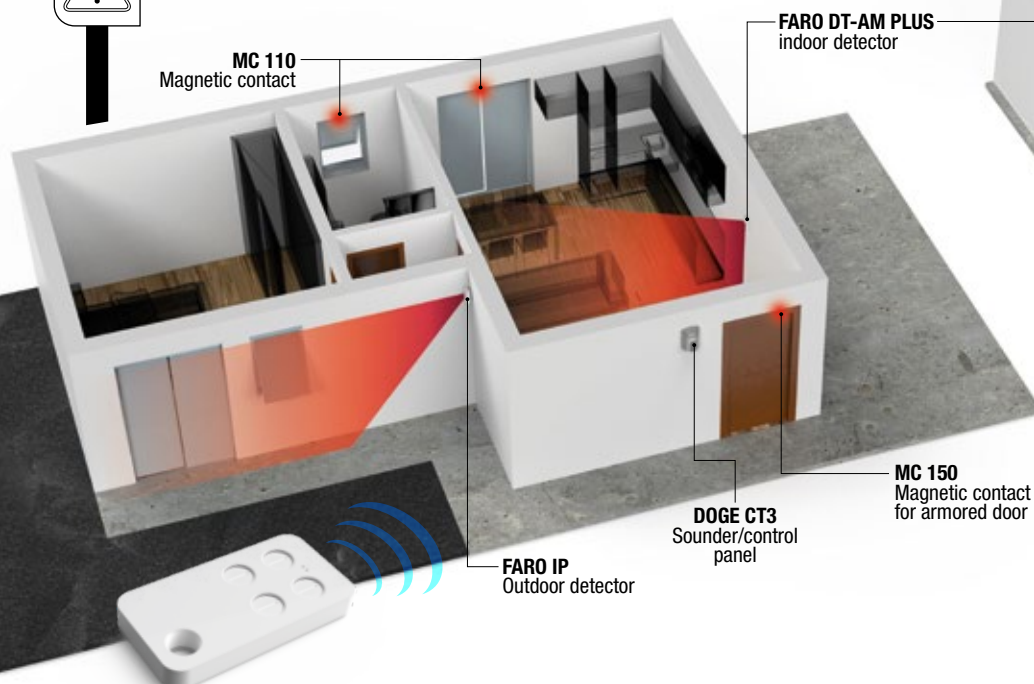

PERFECT SOLUTION TO PROTECT GARAGES



EASY INSTALLATION AND MAINTENANCE



SAFE SCAFFOLDING

- ▶ 3 balanced zones (extension possibility)
- ▶ 1 partialization
- ▶ 230 Vdc power supply
- ▶ LED flashing unit
- ▶ 2 programmable sounds
- ▶ Possibility to set entry/exit timing
- ▶ Management through remote controls and/or wireless keypad.
- ▶ Output for GSM phone dialer

UNITS/PACK

DOGE CT3



- ▶ 13.8 Vdc sounder/control panel with 3 balanced zones, anti-foam and anti-shock device, 1 partition, LED flashing unit, 2 programmable sounds, possibility to set entry/exit timing, output for GSM phone dialer. Manageable by remote control and/or wireless keypads.

1

KIT DOGE CT3

- ▶ Kit sounder/control panel inclusive of: 1 TL1207 power supply, 2 VELA 2.0 remote controls (1 white and 1 dark grey) and 1 VELA RX receiver (1.2 Ah battery not included).

1

WARRANTY
10
YEARS

SECURITY
3°

IP GRADE
44




TM



ABS
ANTI
UV

DOGE CT7


CT7 is the *All in One* system designed to offer a modern security solution and guarantee an easy management of the alarm system.




EXTERNAL COVER COLORS



FLASH COVER COLORS



CT7 SYSTEM

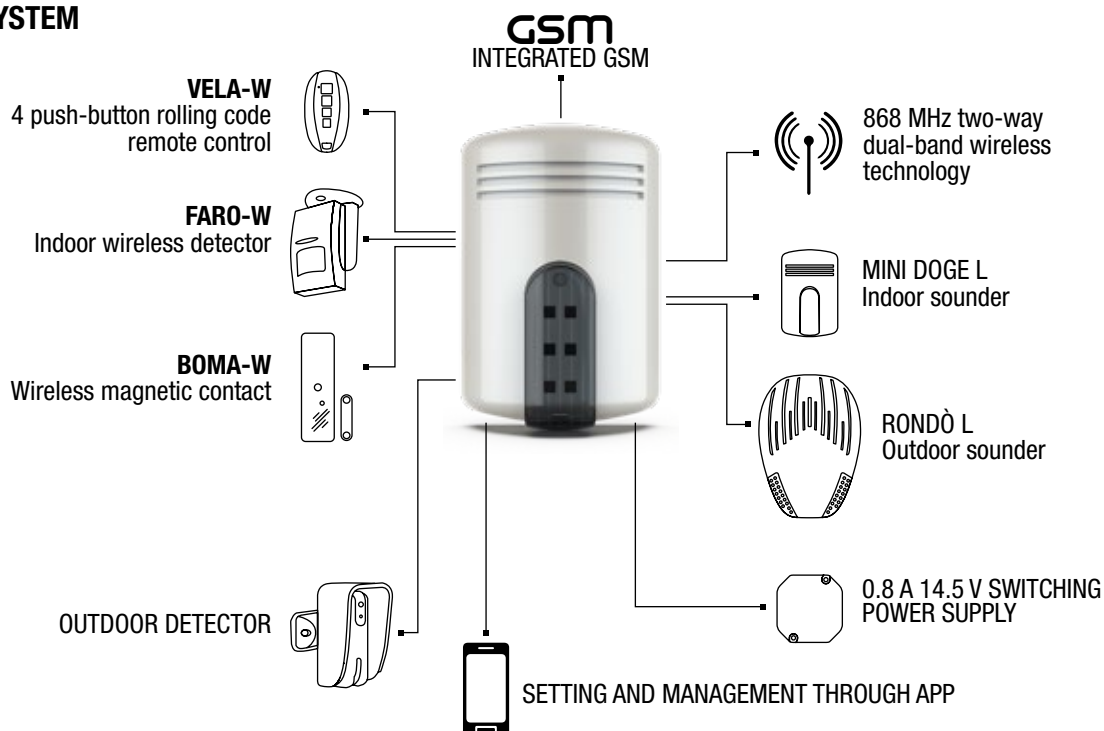

- ▶ Sounder/control panel with 7 zones, anti-foam and anti-shock device, anti-opening and anti-removal tamper.
- ▶ 5 wireless zones with 868 MHz two-way dual-band wireless technology.
- ▶ 2 hardwired zones and 1 on-board tamper zone
- ▶ 800 mA power supply integrated for battery recharge and power of the connected devices.
- ▶ Up to 6 two-way remote controls with optical and acoustic feedback.
- ▶ Management through remote control and the dedicated APP.
- ▶ The RGB LED flashing unit ensures rapid and clear communication regarding alarms and anomalies signalling.



The intuitive **easy-to-use APP** developed by Venitem allows the whole system to be **managed in a few steps**, directly through your smartphone.

UNITS/PACK

DOGE CT7



- ▶ 230 Vac sounder/control panel with 7 zones (5 wireless and 2 hardwired). 868 MHz two-way random encrypted dual-band wireless technology. GSM integrated, 1 O.C. output on-board, anti-foam and anti-shock device. Relay for additional indoor and outdoor sounders.

1

KIT DOGE CT7

- ▶ Kit DOGE CT7 includes: 1 CT7 sonder/control panel, 2 Vela-W remote controls, 1 Boma-W magnetic contact, 1 Faro-W indoor detector with bracket included.

1


ACCESSORIES

VELA-W	Bidirectional remote control. Tech black color.	1
FARO-W	Wireless bidirectional infrared detector.	1
BOMA-W	Wireless bidirectional magnetic contact, with magnetic reed and additional input. Available colors: white and brown.	1
FARO IP ENERGY LINE-W	Dual-technology motion detector, suitable for open outdoor installations, low consumption for wireless systems. Opening range of 8 mt.	1
FARO WINDO-W	Dual-technology curtain detector for protection of openings with cabled transmitter (suitable for balcony and window).	1




CTH-18

Elegant design, multicolor optical signaler and management through dedicated APP. CTH-18 is the wireless control unit able to guarantee style and protection in all types of environment.

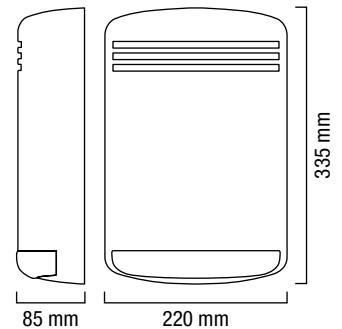

EXTERNAL COVER COLORS

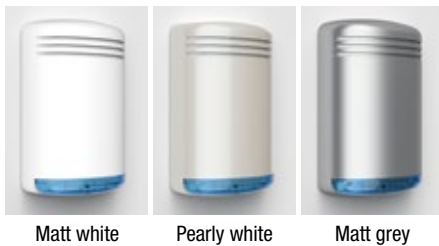


FLASH COVER COLORS



Light blue

CTH-18 SYSTEM



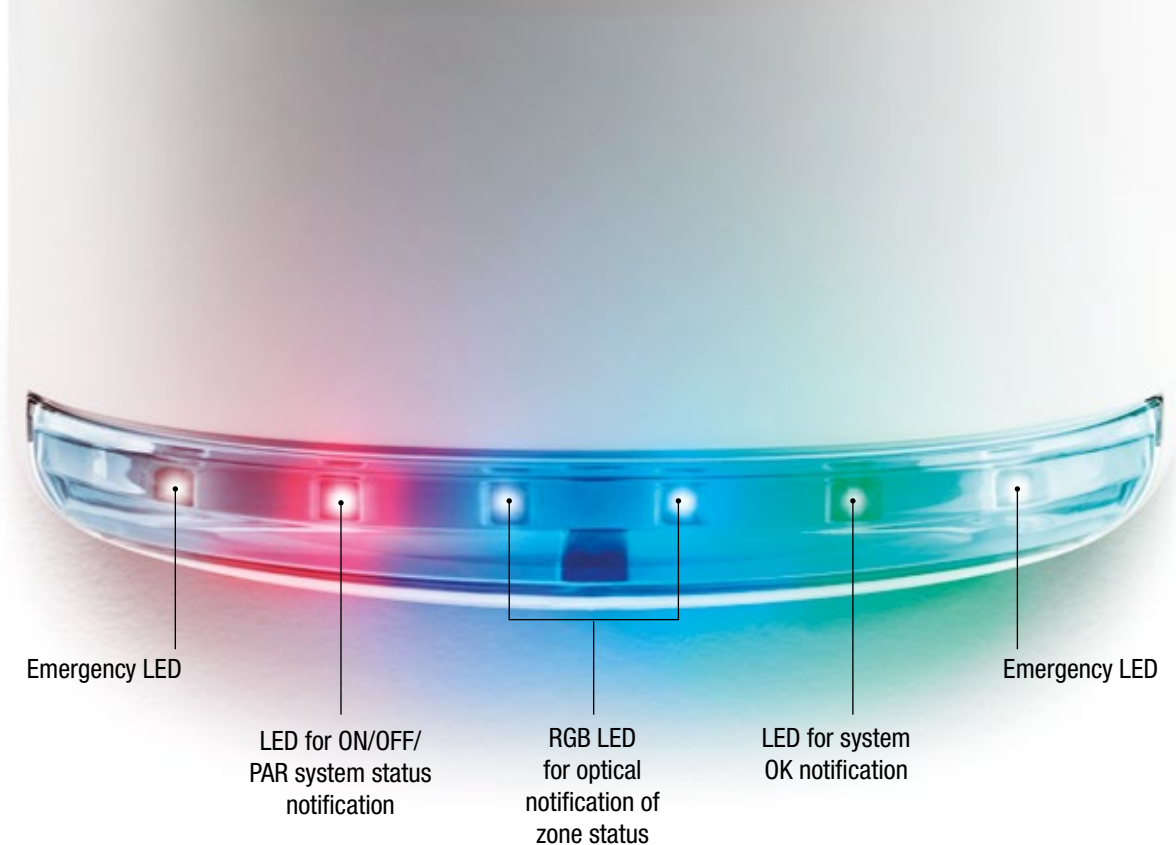

- ▶ Up to 16 wireless devices and 2 wired inputs, for a total of 18 zones and one 24h tamper zone
- ▶ Up to 10 two-way remote controls with 4 buttons and optical and acoustic feedback from the pressed one
- ▶ 868 MHz two-way random encrypted dual-band wireless technology
- ▶ 6 programmable telephone numbers
- ▶ On-board GSM module with micro-SIM slot
- ▶ RGB LED (red, green, blue, white) for optical notifications
- ▶ Emergency LED for 30 minutes
- ▶ Battery housing: 2.1 Ah or 1.2 Ah
- ▶ LED for the notification of integrated GSM
- ▶ 3 open collector outputs for system status, anomalies and buzzer respectively
- ▶ 1 relay output for indoor and outdoor sounders
- ▶ 1 solid-state relay output for user commands (such as “open-gate”) to be managed from the remote control
- ▶ Anti-opening and anti-removal tamper
- ▶ Power supply: 230 Vac 50 Hz and output 14.5 Vdc 0.8 A vacuum resin treated
- ▶ Built-in piezoelectric buzzer for alarm: >100 dB
- ▶ Setting via the dedicated APP for Android and iOS

UNITS/PACK

CTH -18

- ▶ 230 Vac indoor control panel with 18 zones (16 wireless and 2 hardwired).

1



V8-20 / V8-20 XL

Ease of use and flexibility of the performances, allow to create customize security solutions.

FEATURES


- 8 zone control panel, expandable up to 20, in wired or wireless mode (868 MHz).
- Possibility of managing 4 installations, each equipped with 3 ignitions (1 total and 2 partial).
- Possibility of configuration of 20 radio zones.
- 2 solid-state relay outputs, freely programmable.
- Possibility to expand the basic outputs up to max 8 using a 2-relay accessory or a 4-relay BUS expansion.
- Management via dedicated APP.
- Ignition via proximity key or LED keypad

GSM compliance: EN 60950-1, ETSI EN 301 489-1, ETSI EN 301 489-7, ETSI EN 305 511


PSTN compliance: EN 60950-1

Grade: 1


PROXIMITY TAGS: Ergonomic and functional proximity tags to choose the working mode of your alarm system; available in different colors.

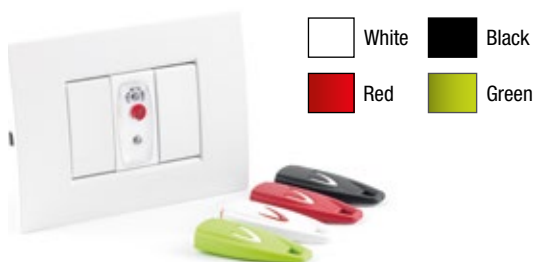

KEYPADS WITH LED: Keypad with anomaly signaling LED and ON/OFF signaling LED. Elegant design, high quality painting and possibility to choose among different colors.

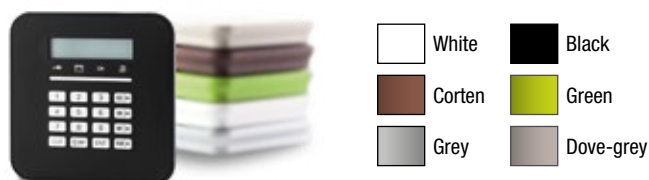

THE WIRELESS EXPANSION MODULE: The wireless expansion module allows the user to set the control panel according to his needs, avoiding building modifications. V8-20 wireless system is based on two-way communication between devices and direct sequence spread spectrum (DSSS), leading communication to uncommon distances.

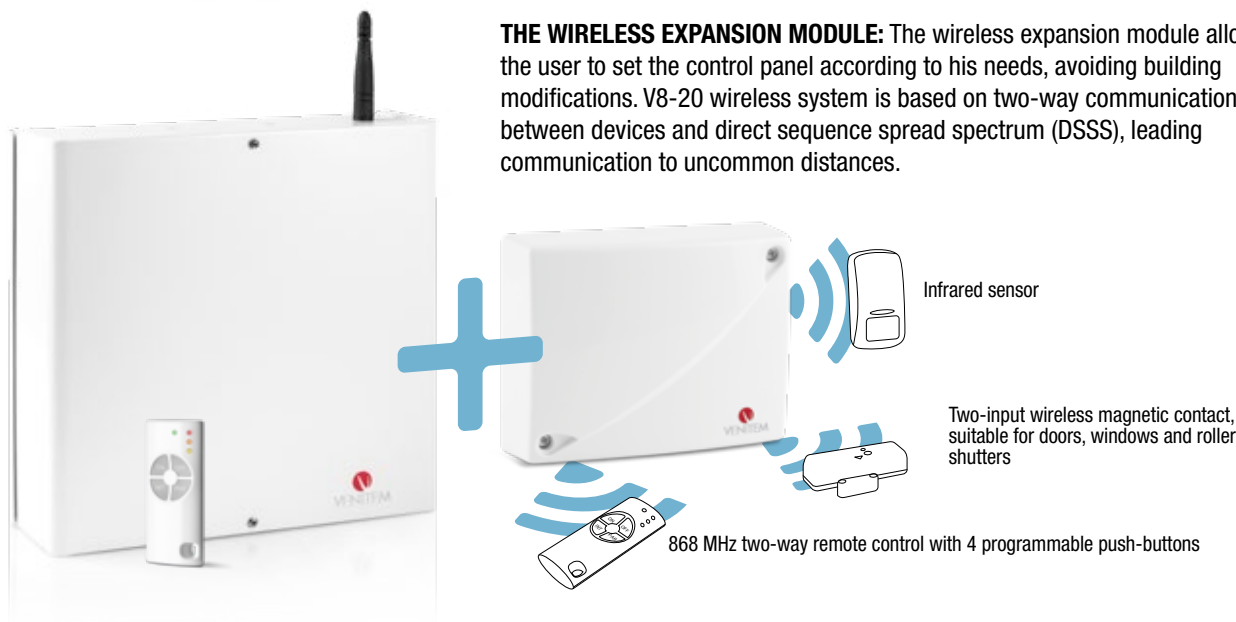

The alarm control panel can be managed using the dedicated APP as well as through vocal telemanagement and SMS. The possibility to arm, disarm, manage and set in partial mode the 8 outputs becomes easy and fast.



UNITS/PACK

V8-20

- ▶ V8-20 8-to-20-zone control panel, integrated GSM, metal case with 1.5 Ah power supply. 1

V8-20 XL

- ▶ V8-20 XL 8-to-20-zone V8-20 XL control panel, integrated GSM, metal case with 3 Ah power supply. 1

ACCESSORIES

DIALER BOARD	Dialer board, to be put inside the control panel box	1
STIRRUP	Stirrup to accommodate expansions inside the control panel box (V8-20).	1
	Stirrup to accommodate expansions inside the control panel box (V8-20 XL).	1
EXPANSION	2-relay output expansion, to be put inside the control panel box.	1
	BUS 4-zone expansion.	1
	BUS 8-zone expansion.	1
	BUS 4-relay output expansion.	1
KEYPAD	Keypad, backlit 2-line 16-character display. Available colors: white, black, corten, green, grey, dove-grey.	1
PROXIMITY TAG READER	Proximity tag reader compatible with all Plana series plaques by Vimar.	1
PROXIMITY TAG	Proximity tag. Available colors: white, black, red and green.	1
PROGRAMMING BOARD	Board for control panel programming, direct connection with mini USB output + cable mini USB/USB.	1
SUPPORTS	Support to accommodate relay boards in the box (pack of 40 pcs).	1
POWER SUPPLY	Power supply 12 Vdc 5 Ah switching power supply for V8-20 XL (four 1 Ah free outputs + one battery charge output).	1

WIRELESS ACCESSORIES

WIRELESS EXPANSION	Two-way 868 MHz wireless expansion, max. 12 wireless devices; max. 4 remote controls.	1
ONE-INPUT WIRELESS CONTACT	Two-way 868 MHz wireless magnetic contact, one input. Available colors: white, brown.	1
THREE-INPUTS WIRELESS CONTACT	Two-way 868 MHz wireless magnetic contact, three inputs. Available colors: white, brown.	1
INFRARED SENSOR	Two-way 868 MHz wireless infrared sensor, Pet Immune technology, up to 12 m detection range.	1
REMOTE CONTROL	Two-way 868 MHz remote control, equipped with 4 buttons.	1
FARO IP ENERGY LINE + THREE INPUTS CONTACT	Two-way 868 MHz double technology wireless sensor "FARO IP Energy Line", up to 8 m detection range + three-input wireless magnetic contact. Battery not included.	1
FARO WINDO ENERGY LINE + THREE INPUTS CONTACT	Two-way 868 MHz wireless sensor "FARO WINDO", low consumption for the protection of openings + three-input wireless magnetic contact. White color.	1





KEYPADS AND *REMOTE CONTROLS*



IP GRADE
68



ONDA TOUCH

Multifunction back-lit keypad for access control, operating stand-alone or via Wiegand protocol. The presence of 1 relay enables the control of 1 opening which up to 2000 users can be assigned to.

Authentication system:



IP GRADE
68



ONDA PULSE

Multifunction back-lit keypad for access control, operating stand-alone or via Wiegand protocol. Equipped with anti-tampering system, allows the control of 2 openings which up to 2000 users can be assigned to.

Authentication system:





ONDA DIGITAL W


IP GRADE
54

Back-lit wireless keypad with rolling code anti-cloning encoding system, suitable for installation not reachable with cables. 2 outputs.



WIRELESS ONDA RX RECEIVER

12 Vdc wireless receiver for ONDA DIGITAL W keypad.
2 outputs.



BOX 503 compatible

◆ Until supplies last

UNITS/PACK

ONDA TOUCH ◆

- ▶ Multifunction back-lit touch access keypad for access control. Waterproof IP68 metal case for outdoor use. The authentication system supports card, PIN or card+PIN. The presence of 1 relay ensures control over one opening which up to 2000 users can be assigned to. 26-bit Wiegand. 12 Vdc operating voltage. Dimensions: 70X103X21 mm.

1

ONDA TOUCH SLIM ◆

- ▶ Multifunction back-lit touch access keypad for access control. Waterproof IP68 metal case for outdoor use. The authentication system supports card, PIN or card+PIN. The presence of 1 relay ensures control over one opening which up to 2000 users can be assigned to. 26-bit Wiegand. 12 Vdc operating voltage. Dimensions: 60x131X21 mm.

1

ONDA PULSE ◆

- ▶ Multifunction back-lit touch access keypad for access control. Waterproof IP68 metal case (vandal-proof) for outdoor use. The authentication system supports PIN, card or PIN+card. The presence of 2 relays enable the control of 2 openings which up to 2000 users can be assigned to. Anti-tampering optical alarm. 26-37 bit Wiegand. 12 Vdc operating voltage. Dimensions: 60x131x21mm.

1

ONDA DIGITAL W ◆

- ▶ Back-lit multifunction access control keypad for outdoors with robust wave-shaped housing made of satinized grey metal color. 433.92 MHz rolling code frequency. Box 503 compatible. Dimensions: 65X109X37mm

1

ONDA RX ◆

- ▶ Wireless 12 Vdc receiver for ONDA DIGITAL W keypad. 12 Vdc operating voltage. Dimensions: 55X45X15mm.

1

REMOTE CONTROL VELA 2.0

Vela 2.0 is an elegant and versatile remote control featuring 4 freely programmable keys and optical feedback.

Vela 2.0 is compatible with all Vela receivers.



COLORS



Dark grey



White

REMOTE CONTROL VELA



VELA is rolling code remote control featuring 4 channels and 433,93 MHz frequency. Vela is a compact, ergonomic and versatile device designed for a number of functions such as remote control in combination with intrusion detection systems, sounders, lights, doors, up-and-over doors.

COLORS



Black



Red



Green

◆ Until supplies last

UNITS/PACK

VELA 2.0

- Rolling code remote control, 4 channels - 433.92 MHz frequency. Compatible with all Vela receivers (except Vela 20 CH-W). Available colors: White, dark grey
Dimensions 70x35x9 mm.

1

VELA ◆



- Rolling code radio transmitter - 4 channel for Vela RX 4CH receiver.
Available colors: black, red, green.

1

VELA RX 12-24

- Receiver with monostable clean contact output - low voltage power supply 12/24 Vdc/Vac. 433.92 MHz ISM radio. Compatible with Vela 2.0, Vela Tondo 6 and Vela Tondo 30 remote controls. Dimensions: 52x43x21 mm.

1

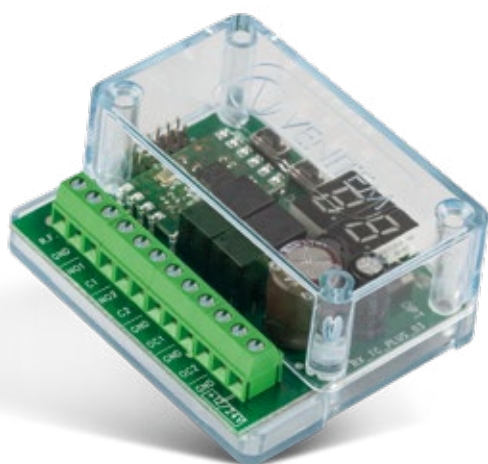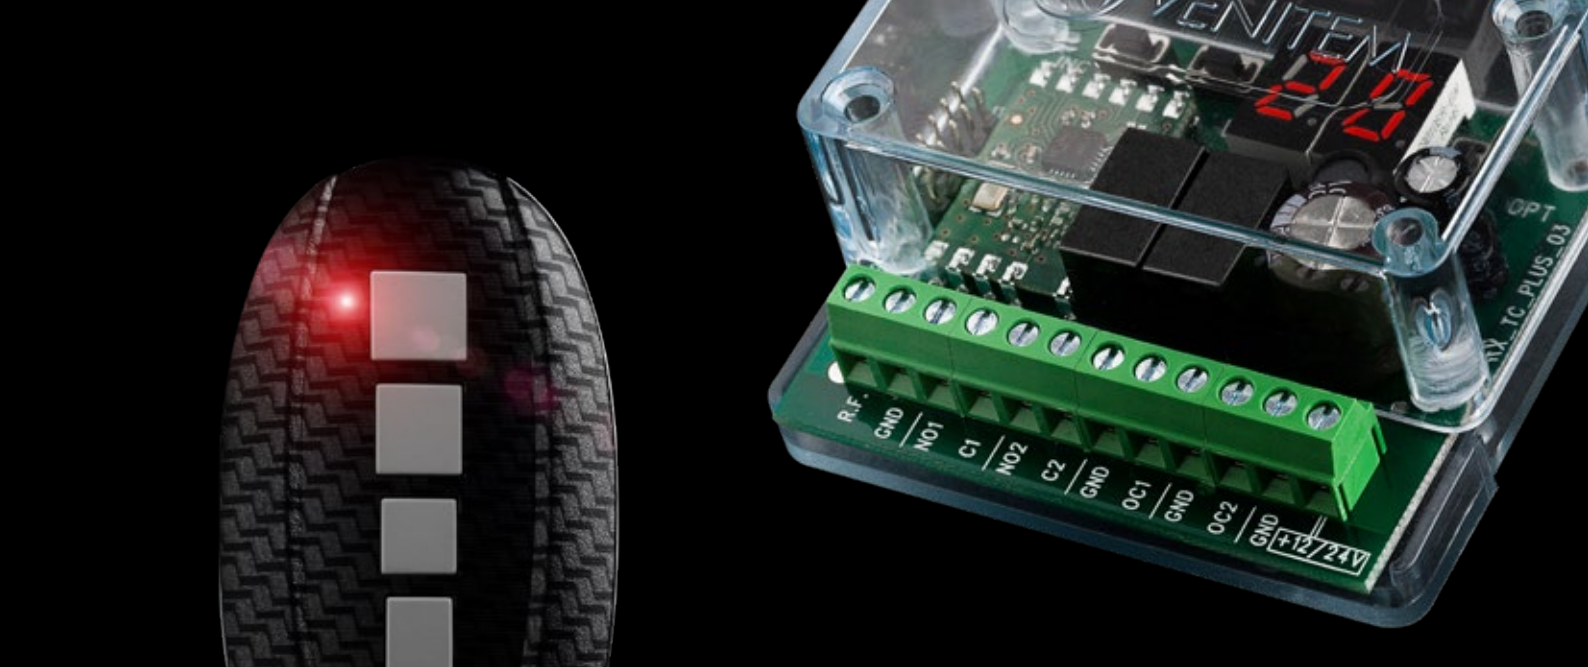

VELA 20 CH-W is the new **868 MHz two-way wireless receiver featuring 4 outputs** and anti-sabotage transmission system, capable of supporting up to **20 wireless devices**. The simple and safe solution designed to increase the potential of the own alarm system.

*The receiver doesn't manage the supervision of devices.

VELA-W

Two-way remote control with modern and elegant design. It is equipped with **4 programmable buttons with 2-color customizable LED signaling**, optical and acoustic feedback for the notification of the correct command reception from the receiver.



◆ Until supplies last

UNITS/PACK

VELA-W

- Bidirectional remote control - exclusive tech-black color. (Compatible with DOGE CT7, CTH-18 and VELA 20 CH-W).

1

VELA 20 CH-W ◆

- 868MHz two-way wireless receiver with 4 outputs (2 relay and 2 open collectors). Capable of supporting up to 20 wireless devices: VELA-W, FARO-W, BOMA-W. 12-24 Vdc power supply. Dimensions: 59X48X15mm.

1









A close-up photograph of a white-framed window. The window is partially open, revealing a wooden floor. The focus is on the magnetic contacts, which are small black components located at the bottom of the window frame. The text "MAGNETIC CONTACTS" is overlaid in a black box at the bottom right.

MAGNETIC *CONTACTS*

MAGNETIC CONTACTS

◆ Until supplies last

		UNITS/PACK
MC 50 ◆		
	Inertial vibration sensor in ABS for shock detection. Flush mounting. Cable length: 170 cm.	5
MC 100 ◆		
	Magnetic contact for flush mounting, brass housing, with anti-tampering wire. Cable length: 200 mm. Average operating distance: 12 mm.	10
MC 110 ◆		
	Magnetic contact for flush mounting, plastic housing, with anti-tampering wire. Cable length: 200 mm. Average operating distance: 12 mm. Available color: white.	10
MC 150B ◆		
	Plastic magnetic contact for flush mounting, high tolerance (armoured doors), screw connection. Max operating distance on wood/plastic: 20 mm - on iron: 10 mm. Available color: white.	5
MC 150M ◆		
	Plastic magnetic contact for flush mounting, high tolerance (armoured doors), screw connection. Max operating distance on wood/plastic: 20 mm - on iron: 10 mm. Available color: brown.	5
MC 200M ◆		
	Plastic magnetic contact, surface mounting with hidden-screw connection and installation. Max operating distance on wood/plastic: 20 mm - on iron: 10 mm. Available color: brown.	10



MC 210M ◆



Plastic magnetic contact, surface mounting, with two wires. Wires length: 200 mm. Average operating distance: 15 mm. Available color: brown.

10

MC 250 ◆



Plastic-housing magnetic contact, extra-slim, surface mounting, double magnets, two wires. Wires length: 200 mm. Average operating distance: 15 mm.


10



A photograph of a modern, dimly lit corridor. The corridor features a glass railing on the right side and a dark floor. In the background, a red light source is visible, creating a strong red glow. The ceiling has recessed lighting. The overall atmosphere is futuristic and high-tech.

OPTICAL-ACOUSTIC *SIGNALERS*

OPTICAL

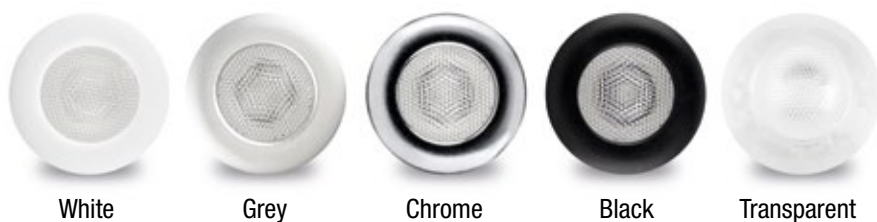

White

Grey

Chrome

Black

Transparent

RLI 3-30V

Steady-light repeater for flush installation - with colored LED - power supply from 3 Vdc to 30 Vdc



FL 100 LED

LED flashing light with adjustable blinks from 50 to 100 per minute



RL 3V RL 12/24V

3 Vdc or 12/24 Vdc steady-light repeater

◆ Until supplies last

UNITS/PACK

RLI 3-30V

- Steady-light repeater for flush installation - with colored LED - power supply from 3Vdc to 30Vdc - consumption: 10 mA. Support available in the following colors: white, grey, chrome, transparent, black. LED available in the following colors: red, white, green, blue, yellow.

1

RL 3V ◆

- 3 Vdc steady-light repeater.

20

RL 12/24V ◆

- 12/24 Vdc steady-light repeater.

20

FL 100 LED

- LED flashing light with adjustable blinks from 50 to 100 per minute - power supply 10-30 Vdc - base in ABS and lens in VEDRIL - electronic circuit protected through resin immersion and against polarity reversal. Available colors: blue, red, orange, yellow, transparent.

1

ACOUSTIC



BZ 96
Piezoelectric buzzer



BZ 100
Powerful buzzer



TR 400
High-power magneto-dynamic horn

UNITS/PACK

BZ96

- ▶ Piezoelectric buzzer - power supply 3-24 Vdc - consumption 13 mA - sound power 96 dB (A) @ 30 cm. 1

BZ100

- ▶ Piezoelectric buzzer - power supply 9-15 Vdc - consumption 130 mA - sound power 108 dB (A) @ 30 cm. 1

TR400

- ▶ High-power magneto-dynamic horn, suitable for very noisy industrial locations. Modulated sound frequency, polarity-reverse protection, electronic circuit tropicalized through resin immersion. Power supply 12 V - consumption 800 mA - sound power 118 dB (A) @ 1 m - sound frequency 2400 Hz modulated - fixing clamp included. 1





OUTDOOR *DETECTORS*

SECURITY

2°

CLASS

IV°



FARO TRIBALANCE

Volumetric detector for outdoors, triple technology with anti-masking and anti-approaching, IP65. Temperature compensation and pet immunity. Partializing lenses for the beams and 45° adapter included.

STANDARD ACCESSORIES




Partializers for lenses




45° ADAPTER
Bracket for angle mounting

TRIBALANCE 8.12

TOP VIEW

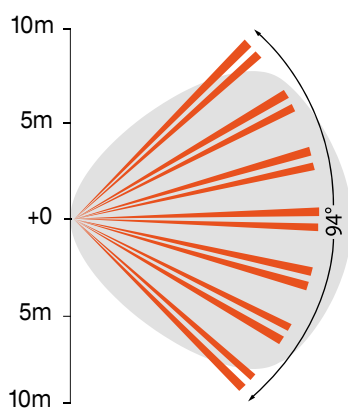


SIDE VIEW

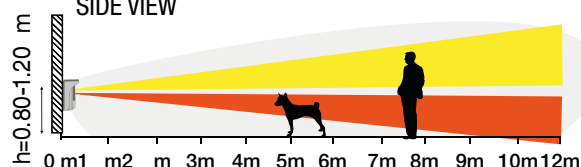


TRIBALANCE 21.23

TOP VIEW

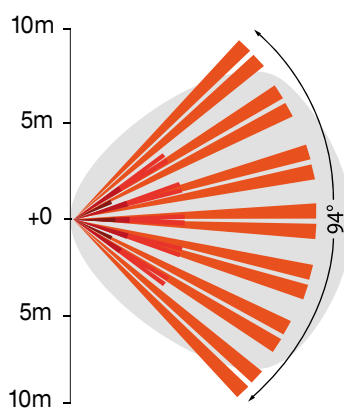

SIDE VIEW

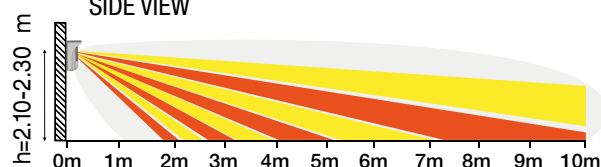



MAIN FEATURES

TRIBALANCE 8.12 TRIBALANCE 21.23

TRIPLE TECHNOLOGY - Triple technology detector with 2 infrared and 1 microwave sections	•	•
INSTALLATION HEIGHT - Installation height between:	0.80 - 1.20 m	2.10 - 2.30 m
METERS RANGE - The detector has an operating range of:	12 m	10 m
INFRARED ANTIMASK (AM + DISTANCE) - It detects any masking attempt in the immediate proximity of the detector via active LEDs technology	•	•
ANTI-APPROACH SYSTEM - It allows to combine the AM with an attempt of approaching the detector	•	•
HIGH RESOLUTION TEMPERATURE COMPENSATION - HW and SW integration for optimization of detection according to temperature	•	•
PET IMMUNITY THREE BALANCE - Immunity to animals with THREE BALANCE logic	•	•
HARD PLASTIC - Container made of high quality plastic designed for outdoor use and UV stabilized	•	•
FAST MOUNTING - Anchor brackets for secure and easy fixing of the detector	•	•
IP GRADE - Protection degree of the enclosure	IP 65	IP 65
PROTECTED ELECTRONIC BOARD - Protected electronic board to guarantee the effectiveness of the detector over time	•	•
EOL RESISTORS - Selectable end of line resistors	•	•

UNITS/PACK

FARO TRIBALANCE 8.12

5

FARO TRIBALANCE 21.23

5

SECURITY
2°

CLASS
IV°




FARO IP PLUS

Curtain detector for outdoors, double technology (MW+PIR) with anti-masking and anti-blinding. IP65, suitable for installations exposed to bad weather conditions. Temperature compensation and filter for small insects. Brackets and adapter for angle, wall and ceiling included.


OPTIONAL:

- PET lens

TOP VIEW

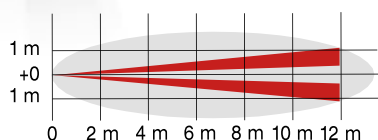

SIDE VIEW

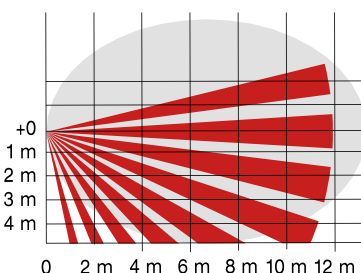

MAIN FEATURES

DT - Dual-technology detector (MW+PIR)

METERS RANGE - The detector has an operating range of: 10 - 12 m

MICROWAVE ANTI-MASKING - It reports any masking attempts of the microwave section

INFRARED ANTI-BLINDING - It reports any blinding attempts of the infrared lens

PET IMMUNITY - Pet immunity against small animals (with the use of the dedicated lens)

CROSSING / APPROACHING - The detector can be set to work in crossing-mode ("curtain") or in approaching-mode ("corridor")

TEMPERATURE COMPENSATION - Processing algorithms automatically optimize the detection according to the temperature

BUG ANTI-MASKING - Anti-masking with filter for small insects

LED OFF - It deactivates detection notice while memory notice is kept enabled

IP GRADE - Protection degree of the enclosure: IP 65

UNITS/PACK

FARO IP PLUS

25

PET LENS - Partializing lens for immunity to animals

1

SECURITY

2°

CLASS

III°




FARO DEDZONE

Curtain detector for outdoors, double technology (MW+PIR) with anti-masking and anti-blinding. Suitable for covered installations.



OPTIONAL:

- Bracket + Adapter + Roof
- PET lens

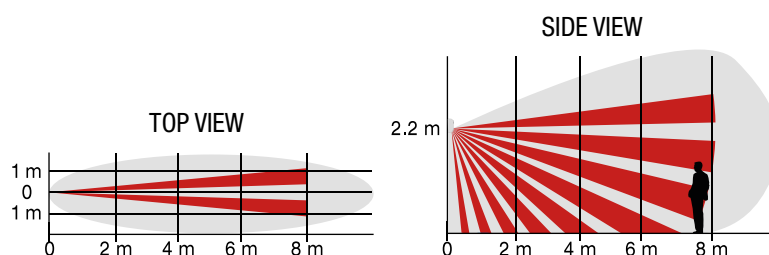

MAIN FEATURES

DT - Dual-technology detector (MW+PIR)

METERS RANGE - The detector has an operating range of: 6 - 8 m

MICROWAVE ANTI-MASKING - It reports any masking attempts of the microwave section

INFRARED ANTI-BLINDING - It reports any blinding attempts of the infrared lens

PET IMMUNITY - Pet immunity against small animals (with the use of the dedicated lens)

CROSSING / APPROACHING - The detector can be set to work in crossing-mode ("curtain") or in approaching-mode ("corridor")

TEMPERATURE COMPENSATION - Processing algorithms automatically optimize the detection according to the temperature

LED OFF - It deactivates detection notice while memory notice is kept enabled

IP GRADE - Protection degree of the enclosure: IP 54

UNITS/PACK

FARO DEDZONE

25

HUB-P - Wall swivel and corner bracket

1

PROTECTION KIT - Complete bracket/swivel for FARO DEDZONE. It includes wall swivel, corner adapter and ceiling adapter + rain cup.

1

PET LENS - Partializing lens for immunity to animals

1





FARO IP ENERGY LINE

Curtain detector for outdoors, double technology (MW+PIR) low consumption, for wireless systems. IP65, suitable for installations exposed to bad weather conditions. Temperature compensation. Brackets and adapter for angle, wall and ceiling included.

OPTIONAL:

- PET lens

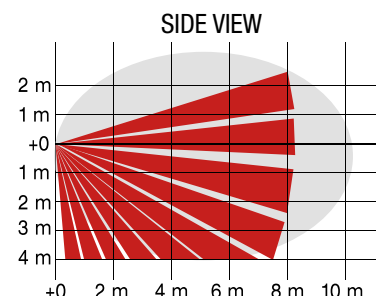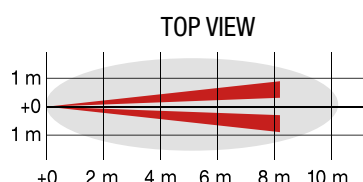

MAIN FEATURES

DT - Dual-technology motion detector (MW+PIR) stand-alone

METERS RANGE - The detector has an operating range of 10-12 m

WIRELESS - Low consumption stand-alone detector for wireless systems

PET IMMUNITY - Pet immunity against small animals (with the use of the dedicated lens)

NO/NC - NO/NC alarm contact selectable by DIP SWITCH

TEMPERATURE COMPENSATION - Processing algorithms automatically optimize the detection according to the temperature

STAND-BY - Selectable stand-by delay

LED OFF - It deactivates detection notice while memory notice is kept enabled

IP GRADE - Protection degree of the enclosure: IP 65

UNITS/PACK

FARO IP ENERGY LINE

12


PET LENS - Partializing lens for immunity to animals

1



FARO MINI

Curtain detector for the protection of openings, double technology (MW+PIR).

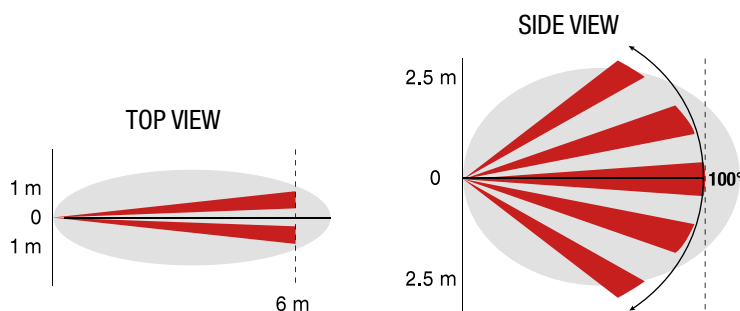

MAIN FEATURES

DT - Dual-technology motion detector (MW+PIR)

METERS RANGE - The detector has an operating range of 5 m (side mounting) or 2.5 m (top mounting)

AND - The alarm is launched when microwave AND infrared detect the intruder

MEMO - After system disarming, this function notifies the first alarm occurred

LED OFF - It deactivates detection notice while memory notice is kept enabled

UNITS/PACK

FARO MINI

30

SECURITY
2°

CLASS
III°



FARO WINDO

Curtain detector for the protection of openings, double technology (MW+PIR) low consumption, for wireless systems.



STANDARD ACCESSORIES



Bracket for fixing at 90°



2 partializing Pet lens

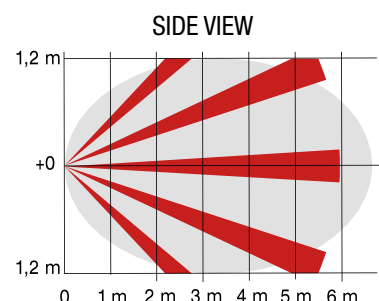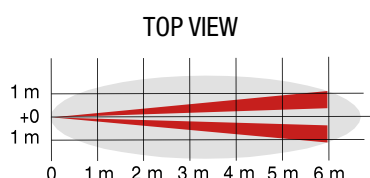

DT - Dual-technology motion detector (MW+PIR) stand-alone

METERS RANGE - The detector has an operating range of 6 m (side mounting) or 3 m (top mounting)

WIRELESS - Low consumption stand-alone detector for wireless systems

PET IMMUNITY - Pet immunity against small animals (with the use of the dedicated lens)

NO/NC - NO/NC alarm contact selectable by DIP SWITCH

TEMPERATURE COMPENSATION - Processing algorithms automatically optimize the detection according to the temperature

LED OFF - It deactivates detection notice while memory notice is kept enabled

STAND-BY - Selectable stand-by delay

SHUTTER/PERIMETER PROTECTION FUNCTION - Functions settable by DIP SWITCH

UNITS/PACK

FARO WINDO

20







INDOOR *DETECTORS*



FARO SUPER DT

Dual-technology (MW+PIR) volumetric detector for indoor installations, with pet immunity.



HUB-DT - Adapter for wall and ceiling installation

MAIN FEATURES

DT - Dual-technology motion detector (MW+PIR)

METERS RANGE - The detector has an operating range of 12 m

PET IMMUNITY - Pet immunity against small animals (settable by DIP SWITCH)

AND - The alarm is launched when microwave AND infrared detect the intruder

ECO/AND - Automatic microwave switching off (low environmental impact)

MEMO - After system disarming, this function notifies the first alarm occurred

LED OFF - It deactivates detection notice while memory notice is kept enabled

UNITS/PACK

FARO SUPER DT

25

HUB-DT - Adapter for wall and ceiling installation

1

SECURITY
2°

CLASS
II°



FARO IR

Volumetric infrared (PIR) detector for indoor installations.

OPTIONAL:

- Corner, wall, ceiling adapter
- Anti-removal tamper (to be used with the adapter)
- Curtain and corridor lenses



HUB - Wall swivel and corner bracket

MAIN FEATURES



DT - Dual-technology motion detector (MW+PIR)



METERS RANGE - The detector has an operating range of 15 m



SENSITIVITY - Selectable on two pre-set levels

	UNITS/PACK
FARO IR	25
HUB - Wall swivel and corner bracket	1
HUB-C - Adapter for ceiling installation - to be used together with HUB	1
CORRIDOR LENS - Corridor lens	1
CURTAIN LENS - Curtain lens	1
KIT TAMPER - Tamper kit against pulling out attempts - requires the HUB	1

SECURITY
2°

CLASS
II°



FARO DT-AM PLUS

Dual-technology (MW+PIR) volumetric detector for indoor installations.

OPTIONAL:

- Corner, wall, ceiling adapter
- Anti-removal tamper (to be used with the adapter)
- Curtain and corridor lenses



HUB - Wall swivel and corner bracket

MAIN FEATURES

DT - Dual-technology motion detector (MW+PIR)

METERS RANGE - The detector has an operating range of 15 mt

MICROWAVE ANTI-MASKING - It reports any masking attempts of the microwave section

INFRARED ANTI-BLINDING - It reports any blinding attempts of the infrared lens

AND/OR - Selectable detection modes

ECO/AND - Automatic microwave switching off (low environmental impact)

SENSITIVITY - Selectable on two pre-set levels

EOL RESISTORS - Selectable end of line resistors

UNITS/PACK

FARO DT-AM PLUS

25

HUB - Wall swivel and corner bracket

1

HUB-C - Adapter for ceiling installation - to be used together with HUB

1

CORRIDOR LENS - Corridor lens

1

CURTAIN LENS - Curtain lens


1

KIT TAMPER - Tamper kit against pulling out attempts - requires the HUB

1





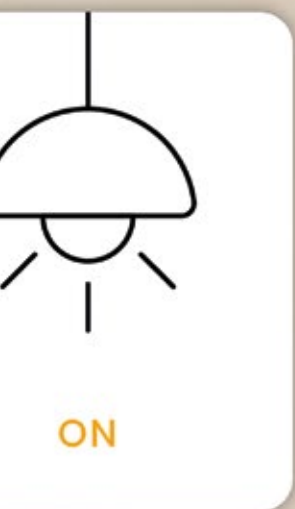

SMART HOME *ACCESSORIES*

VELA TONDO REMOTE CONTROL

Robust and versatile rolling-code remote control, with alloy structure and anti-shock polycarbonate walls, it is suitable to control up to 30 devices, one by one or in groups.



VELA TONDO 30

VELA TONDO 6



UNITS/PACK

VELA TONDO 30

- ▶ 433.92 MHz ISM rolling-code remote control featuring 30 channels and 4 groups. Up- stop-down and pulse functions. Equipped with magnetic support for wall mounting.
Available color: black. Diameter: 80x13 mm.

1

VELA TONDO 6

- ▶ 433.92 MHz ISM rolling-code remote control featuring 6 freely programmable channels. Equipped with magnetic support for wall mounting.
Available colors: white and black. Diameter: 80x13 mm.

1



VELA TOUCH REMOTE CONTROL

Touch and rolling-code remote control, presents a compact design and different possibilities of application.

UNITS/PACK

VELA TOUCH 2

- ▶ 433.92 MHz ISM rolling code remote control, 2 channels with settable function. Available color: white. Dimensions: 40X40X10 mm.

1


VELA TOUCH MOTORE

- ▶ 433.92 MHz ISM rolling code remote control, 1 channel with Up-down-stop function. Available color: white. Dimensions: 40X40X10 mm.

1

VELA RX RECEIVERS

Wireless and hardwired control of lights, rolling shutters, curtains and electrical devices, for a complete management of your spaces. Intuitive and easily integrated solutions, enabling the user to: gradually switch on/off the lighting system, simulate presence, open/close curtains and rolling shutters, etc.

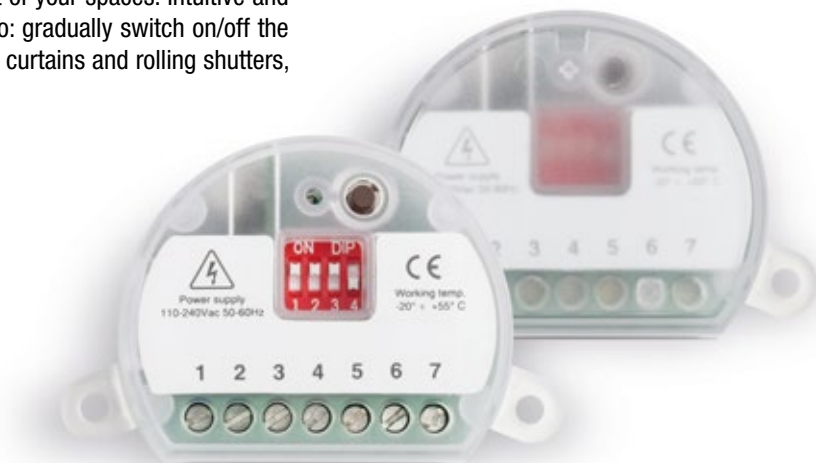

UNITS/PACK

VELA RX 500W

- ▶ Receiver with 2 relay outputs 500 W + 500 W. Time control of 2 devices using 2 buttons or switches. 433.92 MHz ISM wireless and hardwired trigger. Possibility to control the load in monostable, bistable or time-controlled way (from 1 sec to 60 h). 230 Vac power supply. Dimensions: 52X43X21 mm.

1

VELA RX 1000W

- ▶ Receiver with 1 relay output 1000 W, 433.92 MHz ISM wireless and hardwired trigger. Time control of 1 device using 2 buttons or switches. Possibility to control the load in monostable, bistable or time-controlled way (from 1 sec to 60 h). 223 Vac power supply. Dimensions: 52X43X21 mm. "Presence simulation" function.

1

VELA RX MOTORE

- ▶ 433.92 MHz ISM wireless and hardwired trigger. Suitable for controlling electric motors up to max 500 W. Ideal to activate motor-controlled roller shutters, curtains and rolling shutters features 3 different operating modes, i.e. up-down-stop, step-by-step and dead man's switch. ISM frequency band. 230 Vac power supply. Dimensions: 52X43X21 mm.

1

VELA RX DIMMER

- ▶ Electronic receiver suitable to control LED lamps, resistive and halogen lights, inductive loads and electronic transformers, in both wireless and hardwired mode, up to 150 W. The device is equipped with 2 hardwired inputs also enabling gradual turning-out function in 1 hour. Wide and precise dimming and gradual turning-on/out time (fade) from 0 to 10 seconds. 433.92 MHz ISM frequency band. 230 Vac power supply. Dimensions: 52X43X21 mm.

1

VELA RX 12-24

- ▶ Dry-contact monostable receiver with low-voltage (12/24 Vdc/Vac) power supply. 433.92 MHz ISM frequency band. Dimensions: 52X43X21 mm.

1

VELA TX 220-3V

- ▶ 4 channels (buttons or switches) remote control for flush mounting. 230 Vac or 3 V CR2032 battery power supply. 433.95 MHz ISM frequency band. Dimensions: 52X43X21 mm.

1

VELA REPEATER

- ▶ Radio-signal repeater for optimal 433.92 MHz ISM wireless transmission. 220 Vac power supply. Dimensions: 52X43X21mm.

1

ANALYTICAL INDEX

A

AMPEROTTO	82
ATX2/S	21
ATX3	21

B

BOMA-W	101 - 111
BUILT-IN BOX	13
BZ 100	119
BZ 96	119

C

CI PLEXIGLASS	70
CORRIDOR LENS	133 - 134
CTH-18	102
CURTAIN LENS	133 - 134

D

DIALER BOARD	105
DIN BOX	94 - 95
DOGE	18
DOGE AS1	21
DOGE AS1/P	21
DOGE CT3	98
DOGE CT7	100
DOGE EV	68
DOGE F24	56
DOGE PIEZO	22
DOGE WIRELESS	20
DRILLING TEMPLATE	13

E

EXPANSION	105
-----------------	-----

F

FARO DEDZONE	125
FARO DT-AM PLUS	134
FARO IP ENERGY LINE	126
FARO IP ENERGY LINE + THREE INPUTS WIRELESS CONTACT	105
FARO IP ENERGY LINE-W	101
FARO IP PLUS	124
FARO IR	133
FARO MINI	127
FARO SUPER DT	132
FARO TRIBALANCE	123
FARO WINDO	128
FARO WINDO ENERGY LINE + THREE INPUTS WIRELESS	105
FARO WINDO-W	101
FARO-W	101 - 111
FL 100 LED	118
FLUSH-MOUNTING BOX	41

FULL RELAY	94
------------------	----

G

GIUDECCA	12
----------------	----

H

HEMA	28
HOLA	24
HOLA F24EN	64
HOLA UECP	74
HUB	133 - 134
HUB-C	133 - 134
HUB-DT	132
HUB-P	125

I

INFRARED SENSOR	105
-----------------------	-----

K

KEYPAD	105
KIT HOLA UECP	74
KIT TAMPER	133 - 134
KIT1 DOGE WIRELESS	21
KIT1/P DOGE WIRELESS	21
KIT2 DOGE WIRELESS	21
KIT2/P DOGE WIRELESS	21

M

MARINA	26
MC 100	114
MC 110	114
MC 150B	114
MC 150M	114
MC 200M	114
MC 210M	115
MC 250	115
MC 50	114
MC 800W	115
MCV	95
MCX	95
MINI DOGE	42
MINI DOGE F24	66
MINI DOGE FL24	66
MINI GIUDECCA	40
MINI HEMA	44
MINI HOLA	50
MINI MARINA	46
MINI MURANO	48
MOSE	14
MOSE F24EN	60
MTT	95
MURANO	16
MURANO F24EN	62

O

ONDA DIGITAL W	109
ONDA DIGITAL W KEYPAD	74 - 109
ONDA PULSE	108
ONDA RX	109
ONDA TOUCH	108
ONDA TOUCH SLIM	109
ONE-INPUT WIRELESS CONTACT	105

P

PET LENS	124 - 125 - 126
POWER SUPPLY V8-20	105
PROGRAMMING BOARD	105
PROTECTION KIT	125
PROXIMITY TAG	105
PROXIMITY TAG READER	105

R

RA	94
RA/2S	94
RA/T	94
REMOTE CONTROL	105
REMOTE CONTROL VELA	110
REMOTE CONTROL VELA 2.0	110
RIALTO	36
RIO	30
RL 12/24V	118
RL 3V	118
RLI 3-30V	118
RN 12/24	94
RONDÒ	32

S

SP200	52
STIRRUP V8-20 / V8-20 XL	105
SUPPORTS	105

T

TB1	90
TB2	90
TB3	90
TBA 7.5	21
TCH MECHANICAL KEY	74 - 76
THREE-INPUTS WIRELESS CONTACT	105
TL 1207	74 - 76 - 82
TL 132	83
TL 133	83
TL 135	83
TL 2410 IP	85
TL 2415 IP	85
TPUS	78
TPUSA	78

TR 400	119
TRIADE	34
TRIADE F24	58
TRIADE UE	76
TSP	94 - 95
TSW 1510	86
TSW 1510 C	86
TSW 155	86
TSW 155 C	86
TSW 157	86
TSW 157 C	86
TUL 132	84
TUL 133	84
TUL 133 EN	84
TUL 135	84
TUL 373 EN	89
TUL 375 EN	89
TUL 500EN	88

V

V12	87
V4512	87
V8-20 / V8-20 XL	104
VELA 20 CH-W	111
VELA RIPETITORE	139
VELA RX 1000W	139
VELA RX 12-24	110 - 139
VELA RX 500W	139
VELA RX DIMMER	139
VELA RX MOTORE	139
VELA TX 220-3V	139
VELA TONDO REMOTE CONTROL	138
VELA TOUCH 2	138
VELA TOUCH MOTORE	138
VELA-W	101 - 111

W

WIRELESS EXPANSION	105
--------------------------	-----

[illegible]

[illegible]

VENITEM.COM



VENITEM SRL

Via del Lavoro, 10 – 30030 Salzano (VE) – Italy

Ph. +39.041.5740374 - Fax +39.041.5740388

info@venitem.com – www.venitem.com